


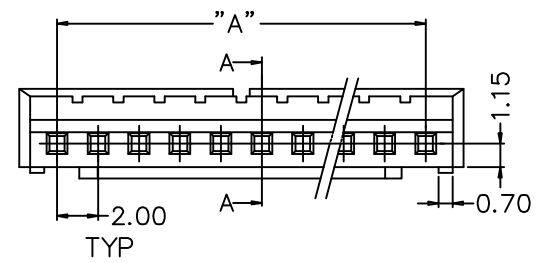
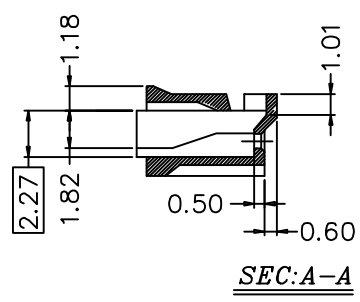



SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)

A2001H00-NP-N*

Colour:
Blank-Natural
A-Black
E-Yellow
F-Green
M-Mickey yellow

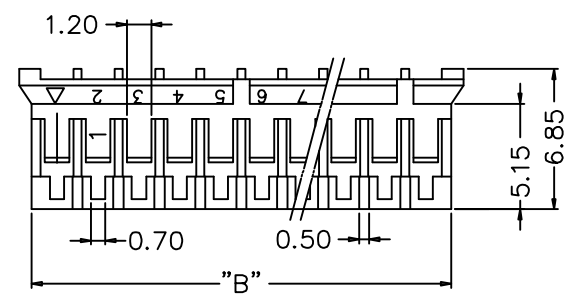

Circuits	Dimensions	
	A	B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE
.0±0.25
0.00±0.15
0.000±0.05

DRAW
DESIGN
CHECK
APPROVE
VERSION

旭能
旭能
吳奇春
吳奇春
ZL2

SCALE
1:1
UNIT
mm
SIZE
A4
SHEET
1/1
PROJ.
☉



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A2001H00-NP-N*
DESCRITON PH2.0 Housing
DRAWING NO. A2001H00-NP-N.dwg