


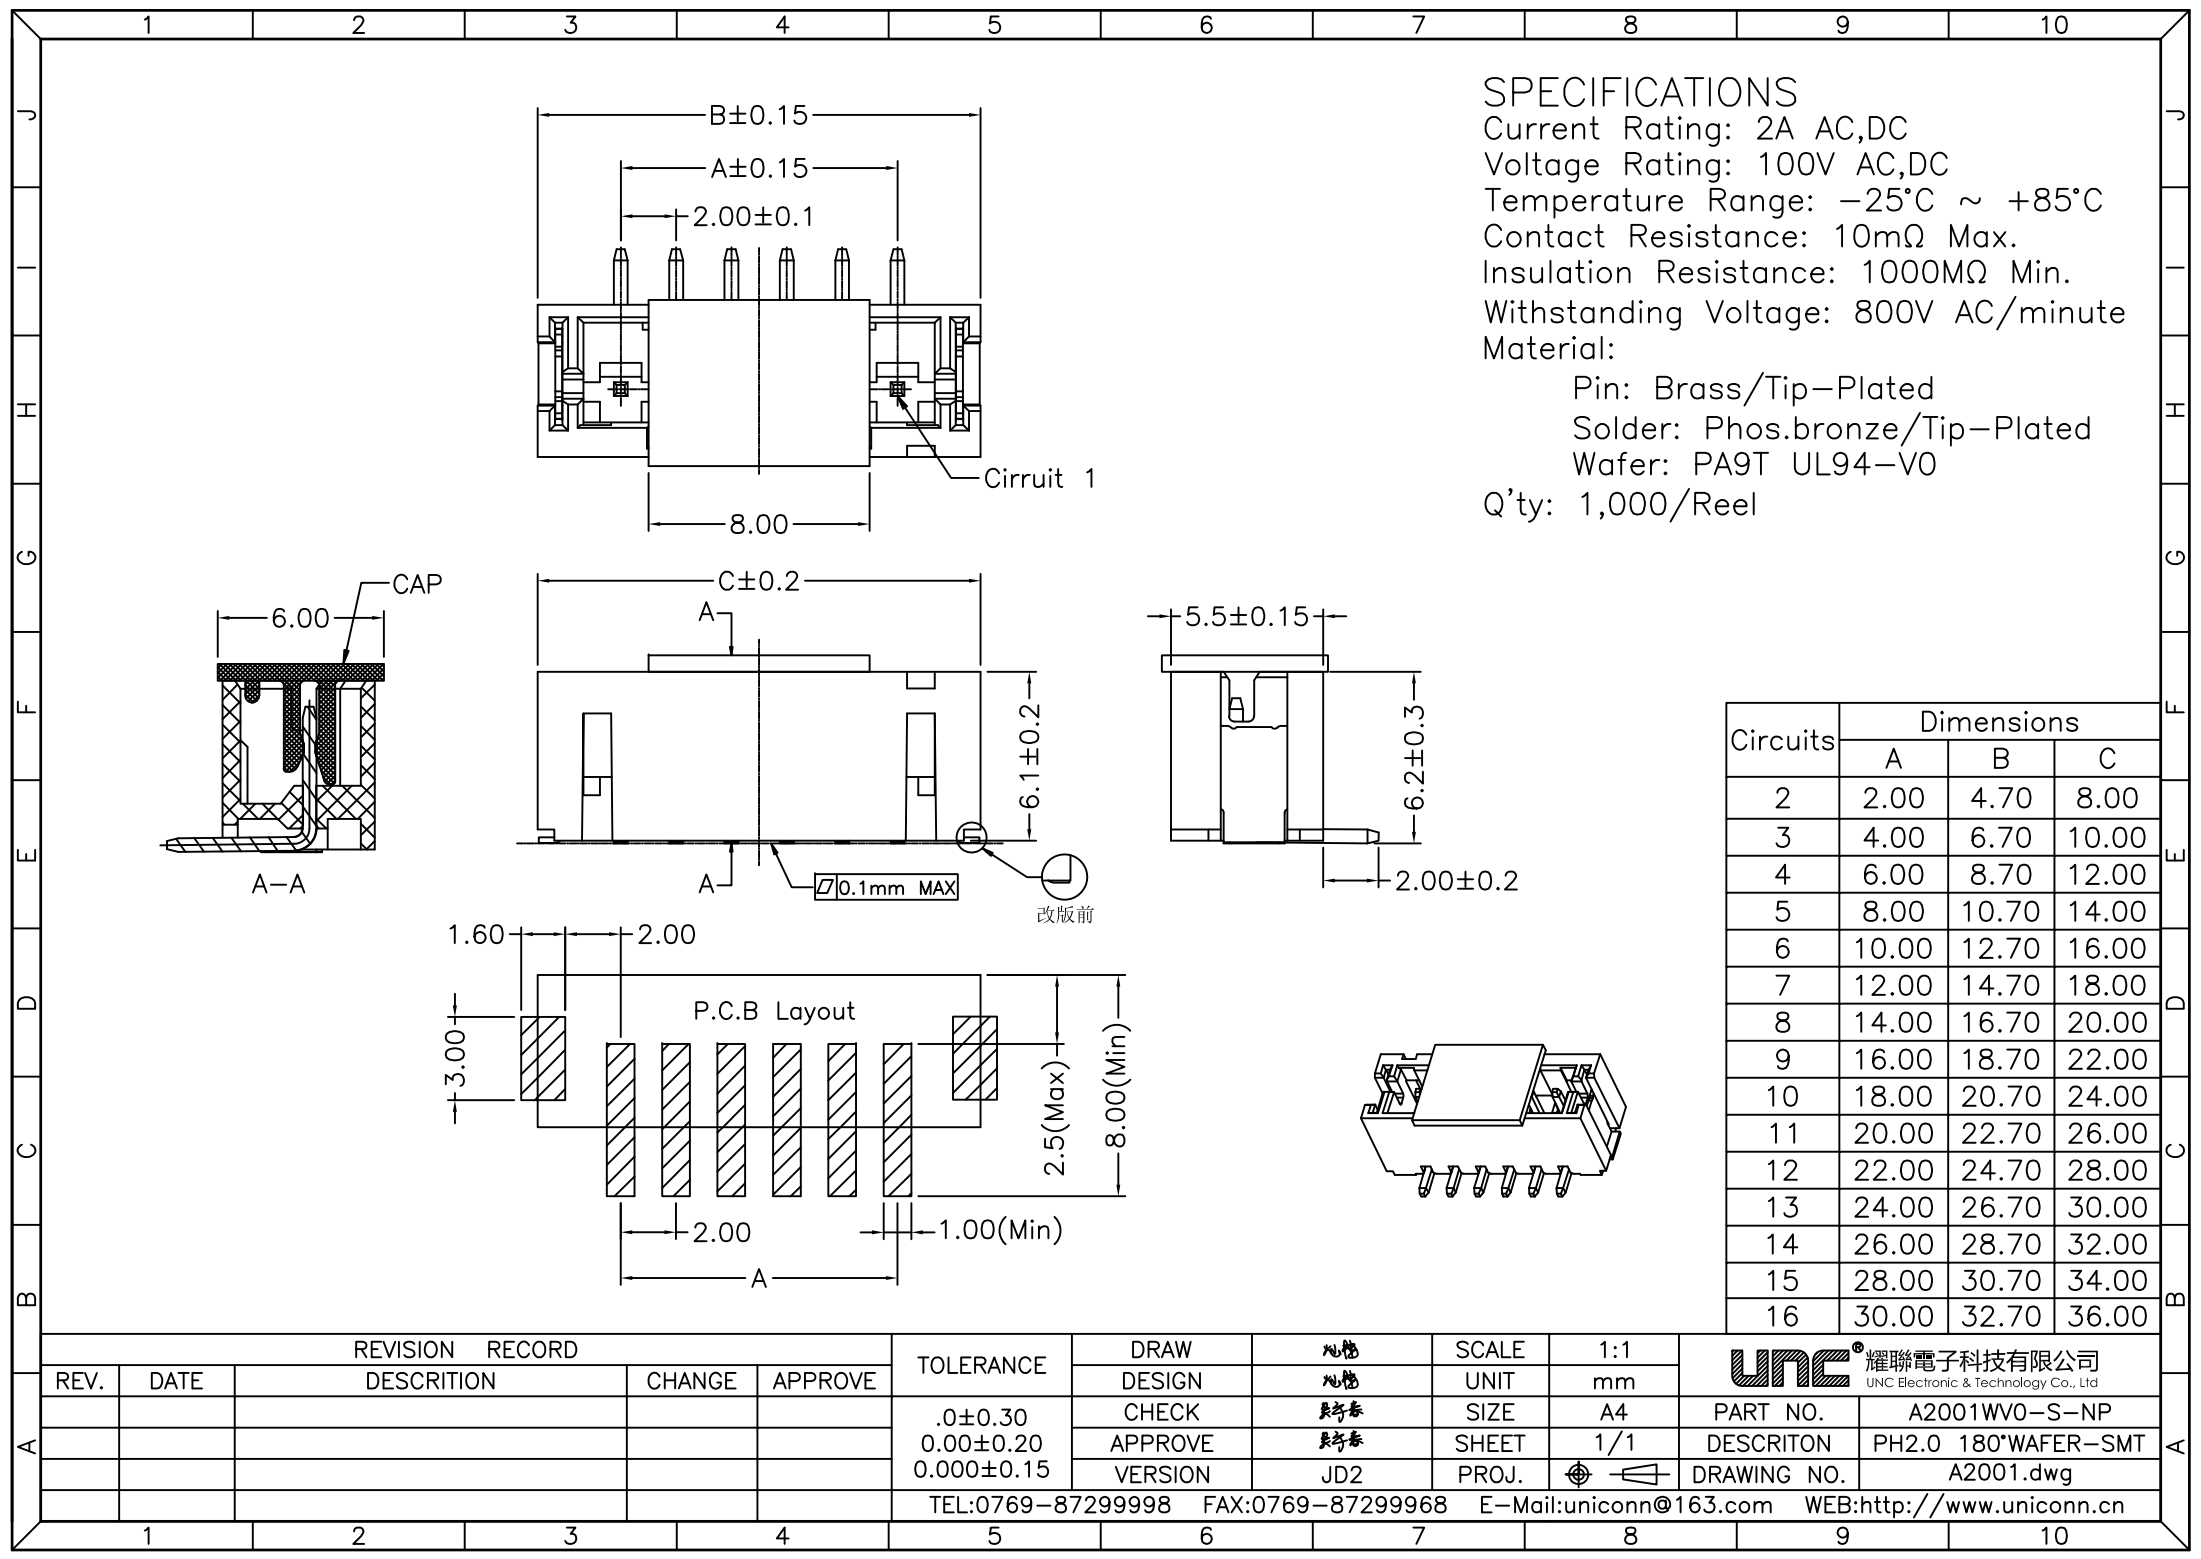

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material:

Pin: Brass/Tip-Plated
Solder: Phos.bronze/Tip-Plated
Wafer: PA9T UL94-V0





Q'ty: 1,000/Reel

Circuits	Dimensions		
	A	B	C
2	2.00	4.70	8.00
3	4.00	6.70	10.00
4	6.00	8.70	12.00
5	8.00	10.70	14.00
6	10.00	12.70	16.00
7	12.00	14.70	18.00
8	14.00	16.70	20.00
9	16.00	18.70	22.00
10	18.00	20.70	24.00
11	20.00	22.70	26.00
12	22.00	24.70	28.00
13	24.00	26.70	30.00
14	26.00	28.70	32.00
15	28.00	30.70	34.00
16	30.00	32.70	36.00

REVISION RECORD				
REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE	DRAW		SCALE	1:1
	DESIGN			
	CHECK			
	APPROVE			
.0±0.30			UNIT	mm
0.00±0.20			SIZE	A4
0.000±0.15			SHEET	1/1
	VERSION	JD2	PROJ.	

UNC 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
PART NO.	A2001WV0-S-NP
DESCRITON	PH2.0 180°WAFER-SMT
DRAWING NO.	A2001.dwg

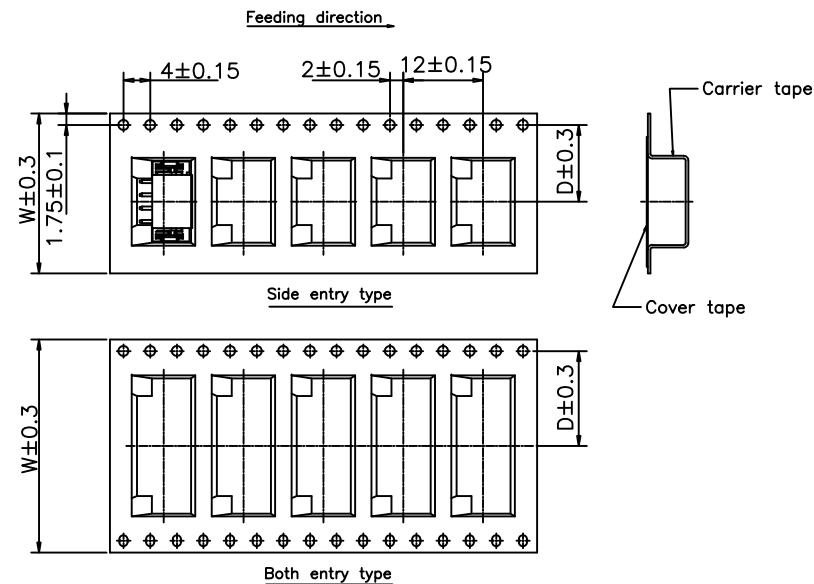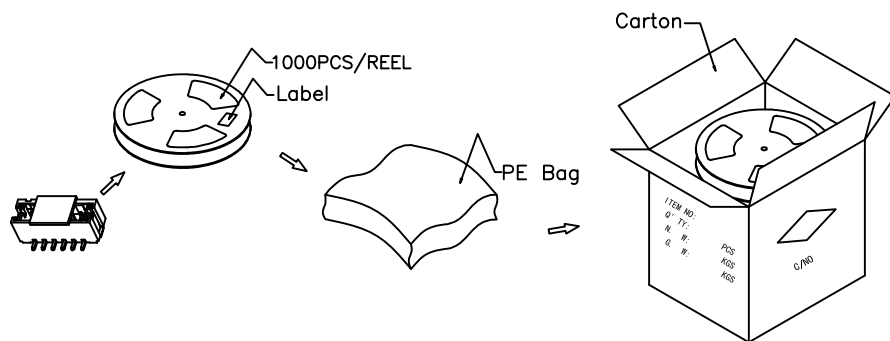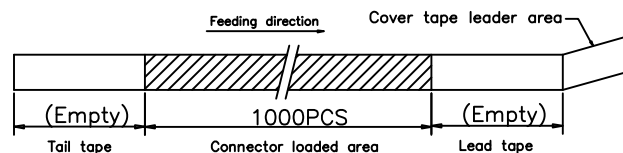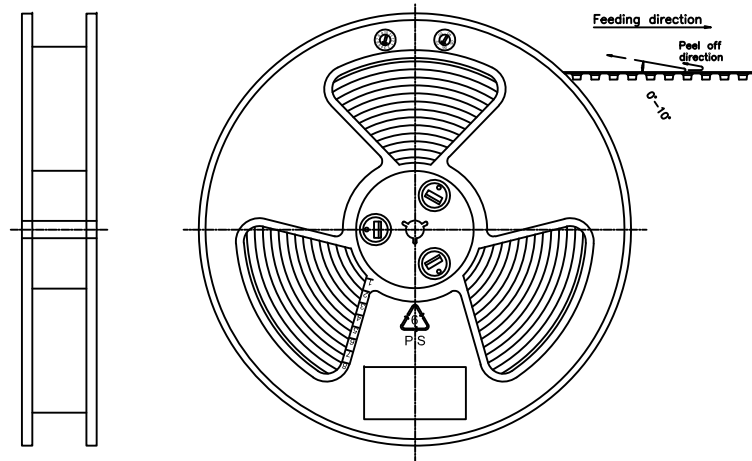

NOTE:

1. 10 sprocket hole cumulative tolerance ± 0.2
2. Carrier camber is within 1.0mm in 250mm
3. Material of carrier tape: PS; 100% recyclable
4. All dimensions meet EIA-481-C requirements
5. Peel off force of cover tape&carrier tape:
20g~130g(0.2N~1.3N)
6. Component load per 15" reel

POLES	REEL TYPE	DIM=D	DIM=W	PCS/REEL	WEIGHT/REEL (REF.)	PCS/CARTON	WEIGHT/CARTON (REF.)		
2	Side entry type	7.5	16.0	1000	/	/	/		
3									
4									
5									
6	Both entry type	11.5	24.0	1000					
7									
8									

REVISION RECORD					TOLERANCE	DRAW		SCALE		UNZ [®] 耀聯電子科技有限公司	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE		DESIGN	UNZ	UNIT	mm	UNC Electronic & Technology Co., Ltd	
						CHECK	吳奇泰	SIZE	A4	PART NO.	A2001WV0-S-NP
						APPROVE	吳奇泰	SHEET	1/1	DESCRITON	PH2.0 180° WAFER-SMT 包裝圖
						VERSION	JD2	PROJ.	PROJ.	DRAWING NO.	A2001.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn