
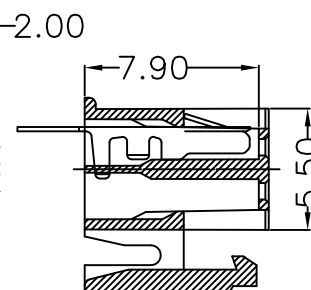
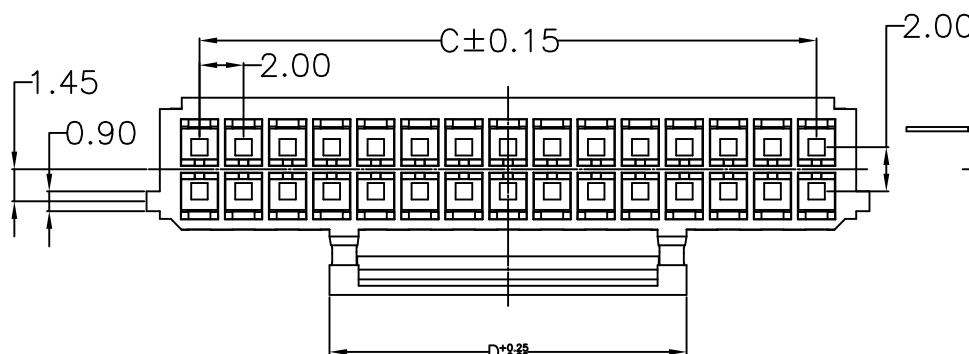
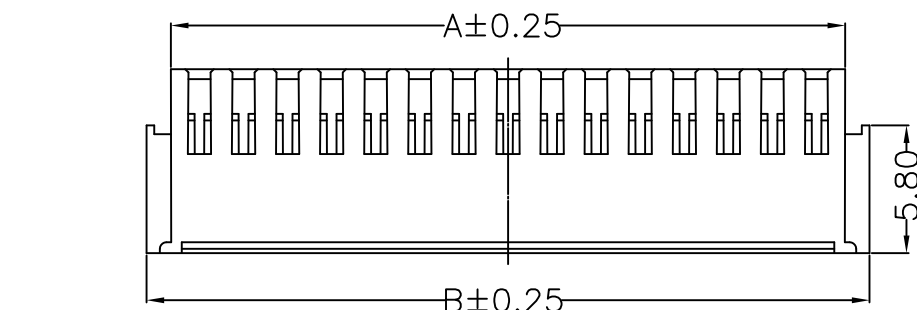



RoHS

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)

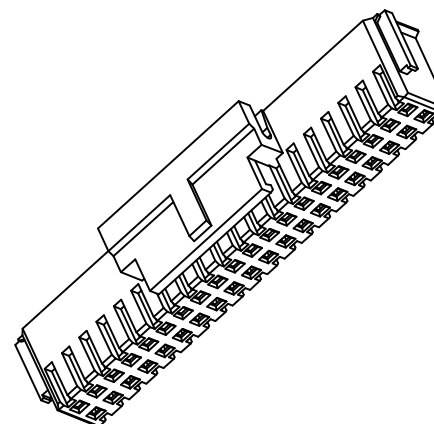

截面 A-A



截面 B-B

Circuits	Dimensions			
	A	B	C	D
2X4	8.60	10.80	6.00	6.20
2X5	10.60	12.80	8.00	6.20
2X6	12.60	14.80	10.00	6.20
2X7	14.60	16.80	12.00	6.20
2X8	16.60	18.80	14.00	6.20
2X9	18.60	20.80	16.00	12.20
2X10	20.60	22.80	18.00	12.20
2X11	22.60	24.80	20.00	12.20
2X12	24.60	26.80	22.00	12.20
2X13	26.60	28.80	24.00	16.20
2X14	28.60	30.80	26.00	16.20
2X15	30.60	32.80	28.00	16.20
2X16	32.60	34.80	30.00	16.20
2x17	34.60	36.80	32.00	16.20
2x18	36.60	38.80	34.00	16.20
2x19	38.60	40.80	36.00	16.20
2x20	40.60	42.80	38.00	16.20

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吳奇泰

吳奇泰

QY1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

A2015H00-2XNP

2.00mm PITCH

HOUSING PLUG

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn