
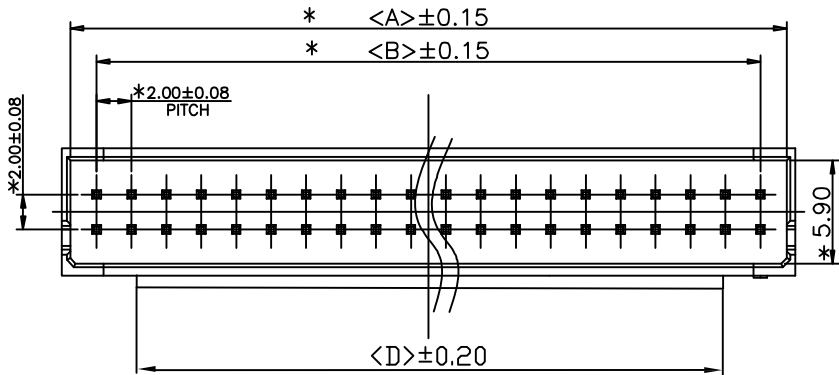





RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: PIN: Brass/Tin-plated
HSG: Nylon 46,UL94V-0
Color: Natural(White)

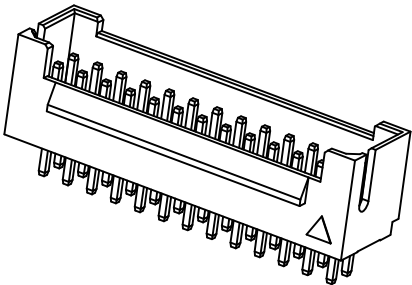

Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.60mm
(Tolerance=±0.05)

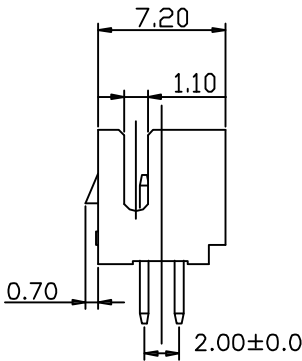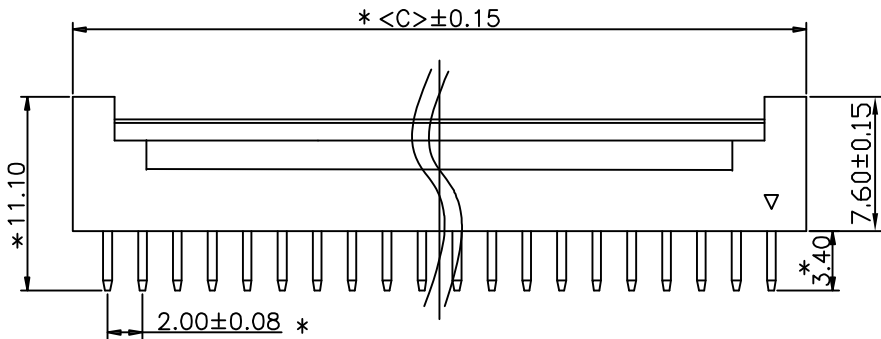

Circuits	Dimensions			
	A	B	C	D
2X04P	8.90	6.00	10.00	2.95
2X05P	10.90	8.00	12.00	4.95
2X06P	12.90	10.00	14.00	6.95
2X07P	14.90	12.00	16.00	8.95
2X08P	16.90	14.00	18.00	10.95
2X09P	18.90	16.00	20.00	12.95
2X10P	20.90	18.00	22.00	14.95
2X11P	22.90	20.00	24.00	16.95
2X12P	24.90	22.00	26.00	18.95
2X13P	26.90	24.00	28.00	20.95
2X14P	28.90	26.00	30.00	22.95
2X15P	30.90	28.00	32.00	24.95
2X16P	32.90	30.00	34.00	26.95
2X17P	34.90	32.00	36.00	28.95
2X18P	36.90	34.00	38.00	30.95
2X19P	38.90	36.00	40.00	32.95
2X20P	40.90	38.00	42.00	34.95
2X21P	42.90	40.00	44.0	38.95
2X22P	44.90	42.00	46.0	40.95

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE
.0±0.25
0.00±0.15
0.000±0.10

DRAW
DESIGN
CHECK
APPROVE
VERSION

旭能
旭能
吳海春
吳海春
JM1

SCALE
UNIT
SIZE
SHEET
PROJ.

1:1
mm
A4
1/1
⌀



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A2015WV0-2XNP
DESCRITON 2.00mm PITCH
DRAWING NO. DUAL-ROW 180° WAFER