

RoHS

SPECIFICATIONS

Current Rating: 2A AC,DC







Voltage Rating: 125V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: 20m Ω Max.Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

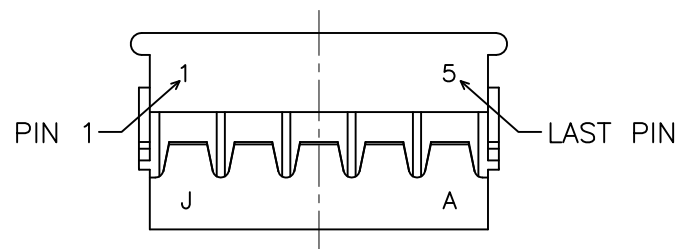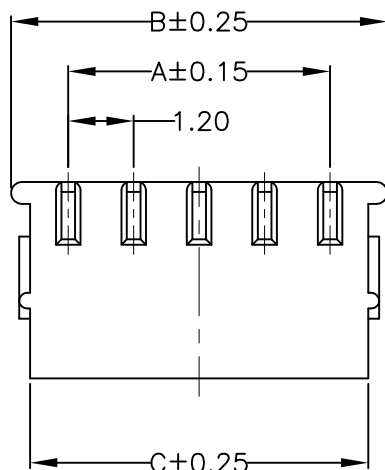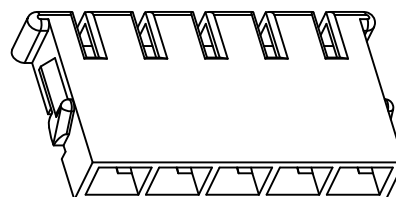

NOTES:
MATERIAL: PBT UL 94V-0(STANDARD)
NYLON66 UL 94V-0(HF)
COLOR: WHITE
A1203H00-xP-**
└ BLANK: STANDARD
HF: HALOGEN FREE

Circuits	Dimensions		
	A	B	C
2	1.20	3.30	2.60
3	2.40	4.50	3.80
4	3.60	5.70	5.00
5	4.80	6.90	6.20
6	6.00	8.10	7.40
7	7.20	9.30	8.60
8	8.40	10.50	9.80

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张舒磊

张舒磊

XP1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

UNC 耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1203H00-NP

DESCRITON

1.20mm PITCH

DRAWING NO.

HOUSING

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn