



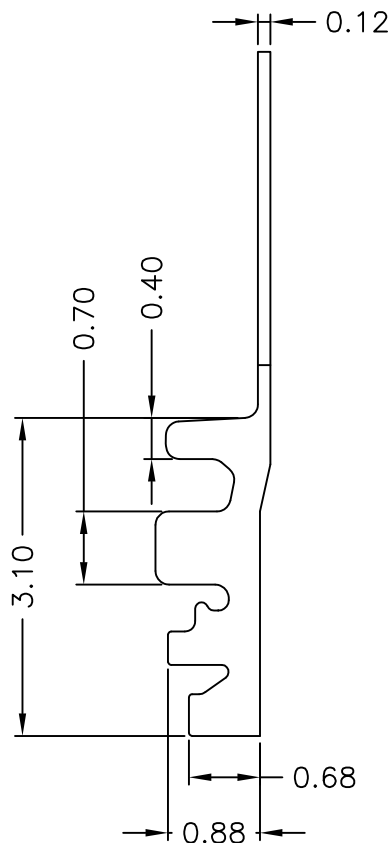


RoHS

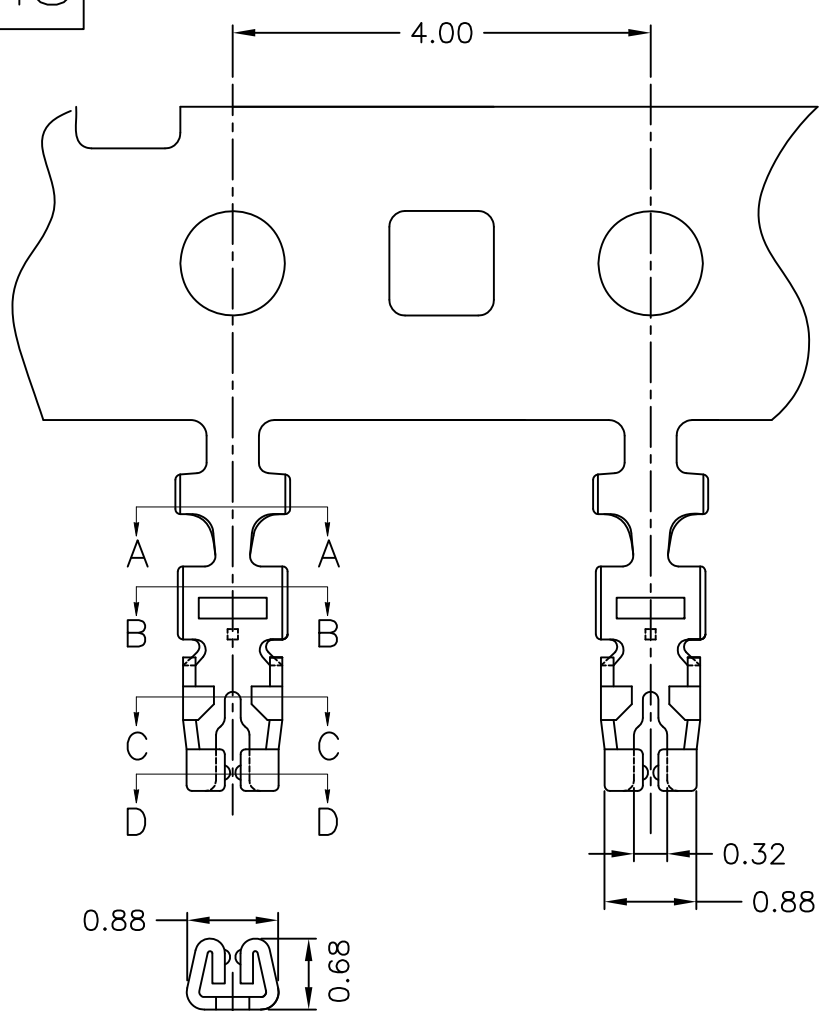

Plating Spec (0*)
00--1μ"
0A--3μ"
0B--4μ"
0C--5μ"
0D--15μ"
0E--30μ"
0F--50μ"
0G--10μ"
0H--2μ"
0I--20μ"
0J--25μ"

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/Reel
A1207T0P-0*	AWG 28#~32#	0.63mm(Max)	Phos.Bronze	Gold-Flash	30,000
A1207T0P-2e	AWG 28#~32#	0.63mm(Max)	Phos.Bronze	Tin-Plated	30,000

Note: e-Stamping before Tin-plated or Gold-flash

REVISION RECORD					TOLERANCE	DRAW	SCALE	1:1	UNC 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE						
					.0±0.25	DESIGN	UNIT	mm	PART NO.	A1207T0P-xx
					0.00±0.15	CHECK	SIZE	A4	DESCRITON	1.20mm Pitch
					0.000±0.10	APPROVE	SHEET	1/1	DRAWING NO.	Terminal
						VERSION	PROJ.	Y21		

NOTE:

A. Gold Plated Area.

B. Tested Area For Coating Thickness.

C. Point of Measurement For Coating Thickness.

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn