

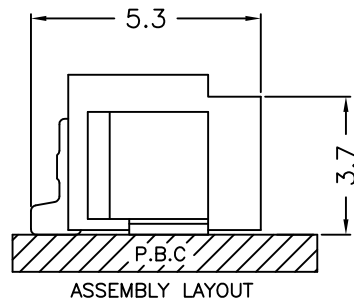
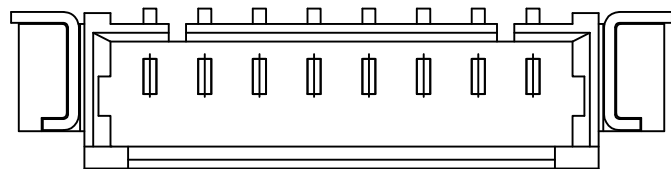
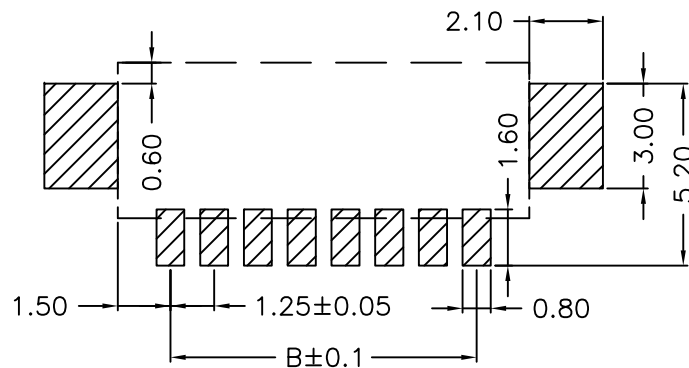


RoHS

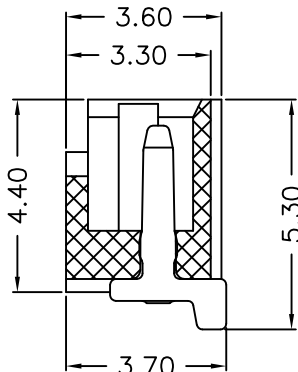

ASSEMBLY LAYOUT

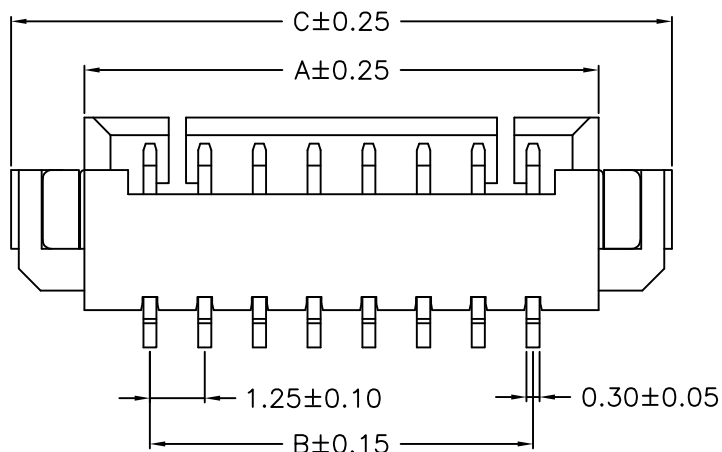

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 500V AC/minute
Material:

Housing: Nylon46,UL94V-0

PIN/Solder tab:

Phos.bronze,Tin-plated

Circuits	Dimensions		
	A	B	C
2	4.25	1.25	7.55
3	5.50	2.50	8.80
4	6.75	3.75	10.05
5	8.00	5.00	11.30
6	9.25	6.25	12.55
7	10.50	7.50	13.80
8	11.75	8.75	15.05
9	13.00	10.00	16.30
10	14.25	11.25	17.55
11	15.50	12.50	18.80
12	16.75	13.75	20.05
13	18.00	15.00	21.30
14	19.25	16.25	22.55
15	20.50	17.50	23.80
16	21.75	18.75	25.05
17	23.00	20.00	26.30
18	24.25	21.25	27.55

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

JD1

JD1

JD1

JD1

SCALE

1:1

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

JD1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1251WR0-S-NP

DESCRITON

MX1.25 90° WAFER-SMT

DRAWING NO.

A1251.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn