



RoHS




SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 250V AC/minute
Material:


Housing: Nylon46,UL94V-0
PIN: Phos.bronze,Tin-plated

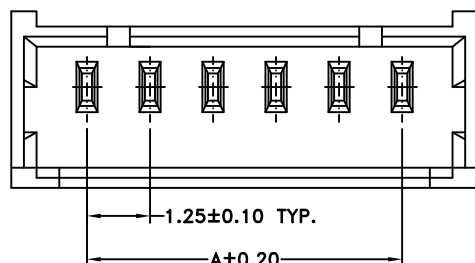

P.C.B. LAYOUT

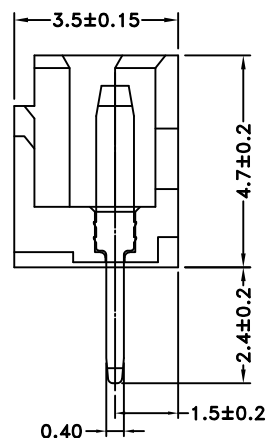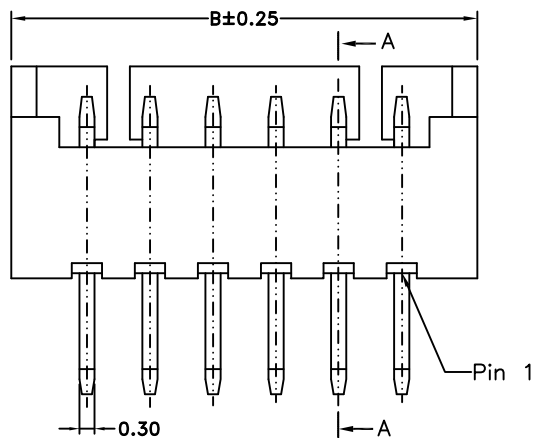

SECTION A-A



2P/3P:一个开口

Circuits	Dimensions	
	A	B
2	1.25	4.35
3	2.50	5.60
4	3.75	6.85
5	5.00	8.10
6	6.25	9.35
7	7.50	10.60
8	8.75	11.85
9	10.00	13.10
10	11.25	14.35
11	12.50	15.60
12	13.75	16.85
13	15.00	18.10
14	16.25	19.35
15	17.50	20.60
16	18.75	21.85

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.20
0.000±0.15

DRAW

DESIGN
CHECK
APPROVE
VERSION

邓彬

邓彬

邓彬

邓彬

JD1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

UNC

耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1251WV0-NP

DESCRITON

MX1.25 180° WAFER

DRAWING NO.

A1251.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn