
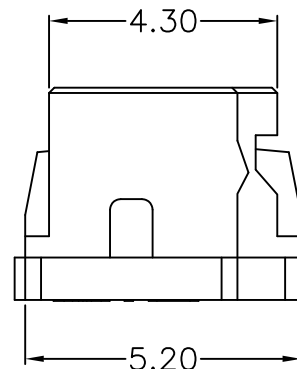
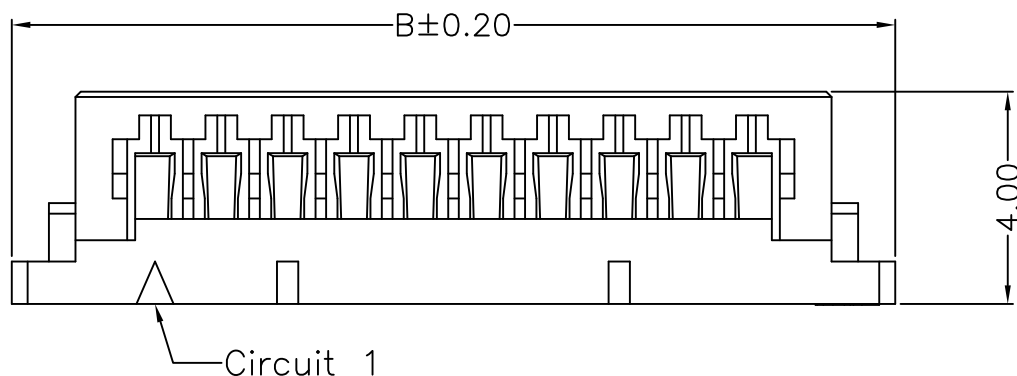
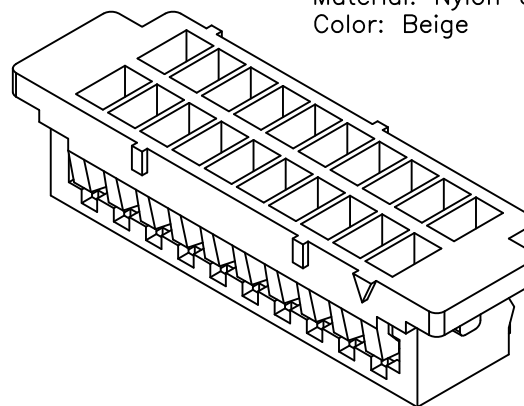


RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0
Color: Beige

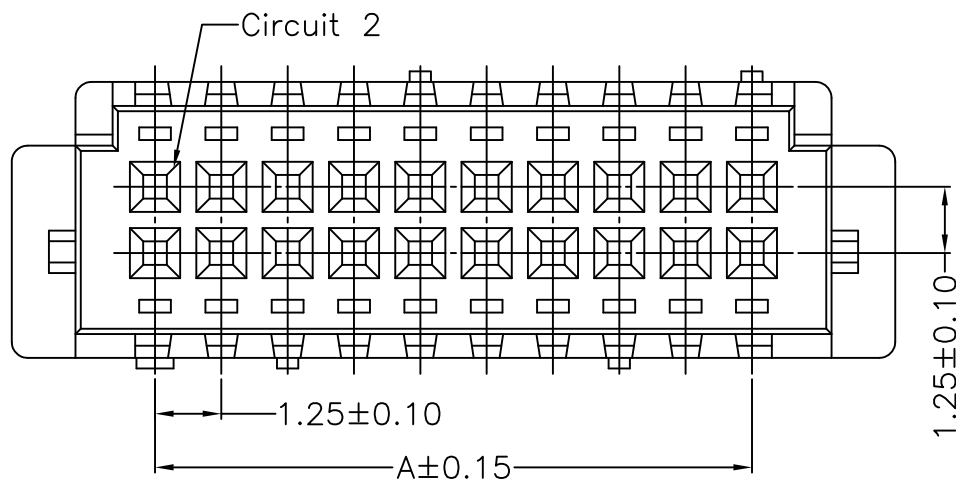

Circuits	Dimensions	
	A	B
2X5	5.00	10.40
2X6	6.25	11.65
2X7	7.50	12.90
2X10	11.25	16.65
2X15	17.50	22.90
2X17	20.00	25.40
2X18	21.25	26.65
2X20	23.75	29.15
2X21	25.00	30.40
2X25	30.00	35.40

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭能

旭能

张舒

张舒

XP1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

⌀



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

A1252H00-2XNP

WIRE TO BOARD, PLUG,
PITCH 1.25mm, CRIMP TYPE,
INSULATOR

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn