
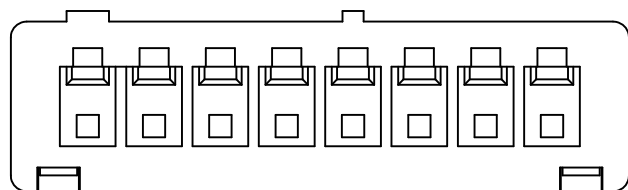
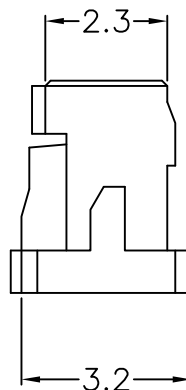
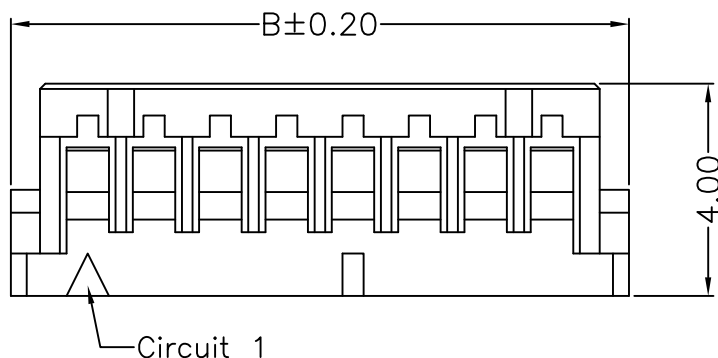
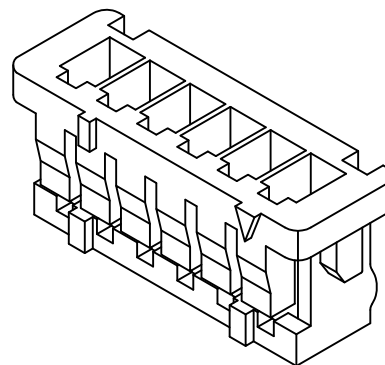


RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0
Color: Beige

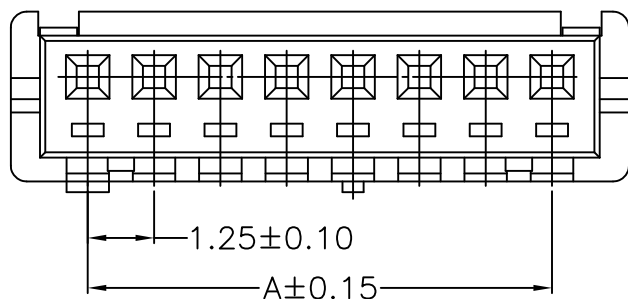

Circuits	Dimensions	
	A	B
2	1.25	4.15
3	2.50	5.40
4	3.75	6.65
5	5.00	7.90
6	6.25	9.15
7	7.50	10.40
8	8.75	11.65
9	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吴奇春

吴奇春

XP1

SCALE

1:1
UNIT
SIZE
SHEET
PROJ.

mm

A4

1/1

⌀

≡



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1252H00-NP

DESCRITON

WIRE TO BOARD, PLUG,
PITCH 1.25mm, CRIMP TYPE,
INSULATOR

DRAWING NO.

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn