
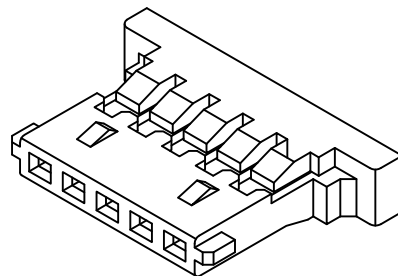


RoHS

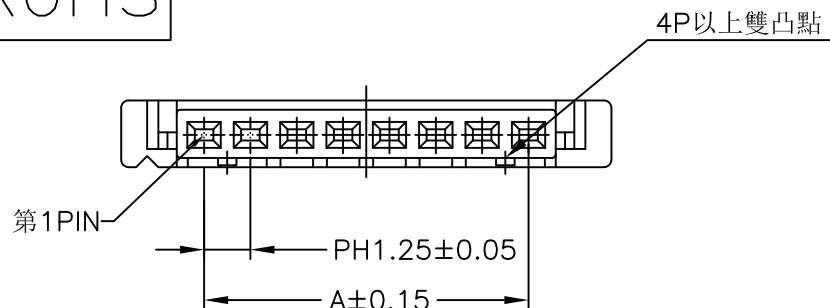

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C





Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

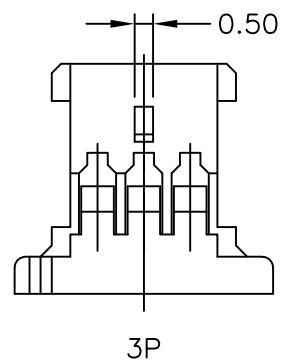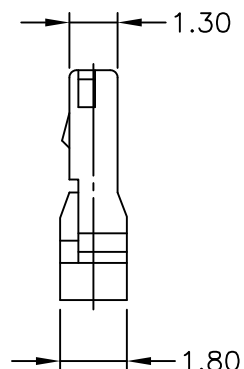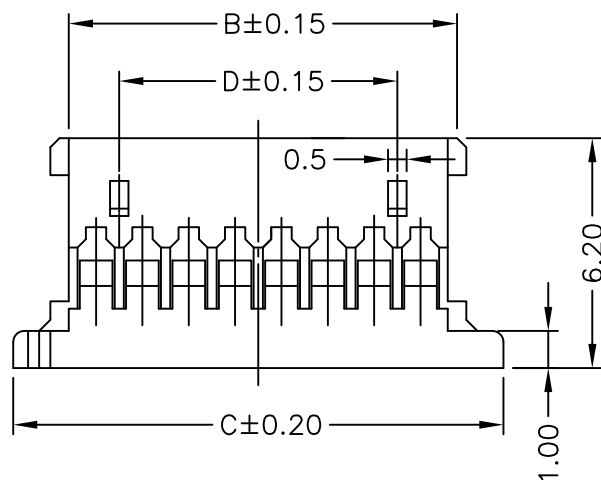

Circuits	Dimensions			
	A	B	C	D
2	1.25	2.72	5.72	--
3	2.50	3.97	6.97	--
4	3.75	5.22	8.22	2.50
5	5.00	6.47	9.47	3.75
6	6.25	7.72	10.72	5.00
7	7.50	8.97	11.97	6.25
8	8.75	10.22	13.22	7.50
9	10.00	11.47	14.47	8.75
10	11.25	12.72	15.72	10.00
11	12.50	13.97	16.97	11.25
12	13.75	15.22	18.22	12.50
13	15.00	16.47	19.47	13.75
14	16.25	17.72	20.72	15.00
15	17.50	18.97	21.97	16.25
16	18.75	20.22	23.22	17.50
20	23.75	25.22	28.22	22.50
30	36.25	37.72	40.72	35.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭德

旭德

陈海

陈海

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1254H00-NP

DESCRITON

MX51146 Housing

DRAWING NO.

A1254.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn