


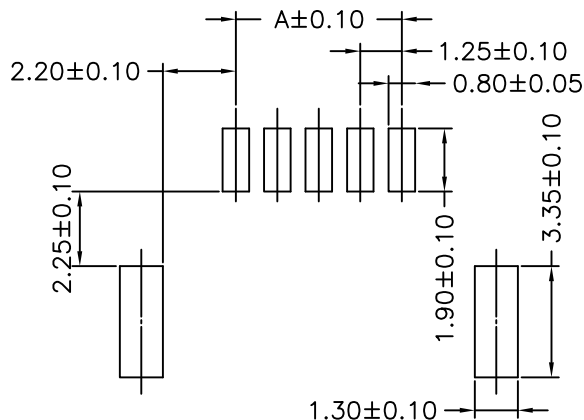
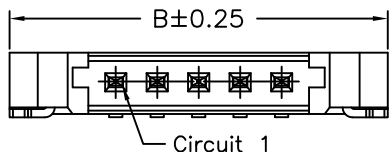



2P

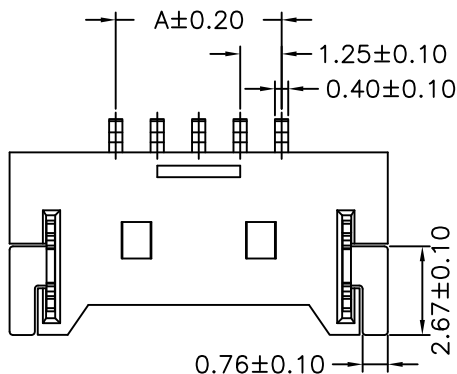


3P



P.C.B. LAYOUT



02~20P



30P

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material:

Pin: Brass/Gold-Flash
Solder: Brass/Gold-Flash
Wafer: Nylon6T,UL94V-0
Color: Natural(Beige)

Circuits	Dimensions		
	A	B	C
2	1.25	7.65	8.07
3	2.50	8.90	9.32
4	3.75	10.15	10.57
5	5.00	11.40	11.82
6	6.25	12.65	13.07
7	7.50	13.90	14.32
8	8.75	15.15	15.57
9	10.00	16.40	16.82
10	11.25	17.65	18.07
11	12.50	18.90	19.32
12	13.75	20.15	20.57
14	16.25	22.65	23.07
15	17.50	23.90	24.32
16	18.75	25.15	25.57
20	23.75	30.15	30.57
30	36.25	42.65	43.07

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.08

DRAW

DESIGN
CHECK
APPROVE
VERSION

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

0.00

0.00

0.00

0.00



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1254WR0-S-NP

DESCRITON

MX51146 Wafer

DRAWING NO.

A1254.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn