

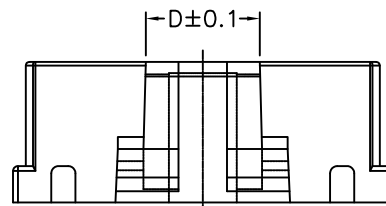

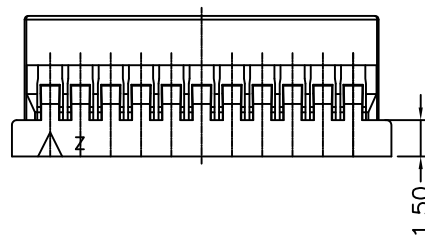



RoHS

SPECIFICATIONS


Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0

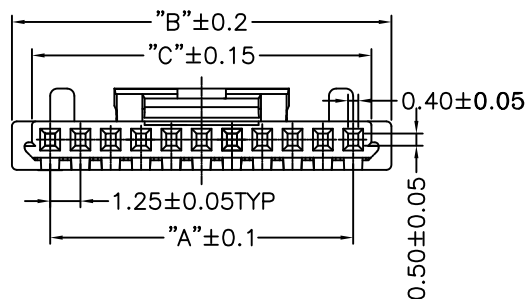


11P~30P

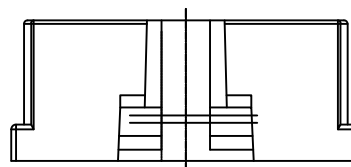


6P~10P




2P



3P



4P



5P

Circuits	Dimensions			
	A	B	C	D
2	1.25	4.40	2.75	1.10
3	2.50	5.65	4.00	1.95
4	3.75	6.90	5.25	3.20
5	5.00	8.15	6.50	3.20
6	6.25	9.40	7.75	3.20
7	7.50	10.65	9.00	3.20
8	8.75	11.90	10.25	3.20
9	10.00	13.15	11.50	3.20
10	11.25	14.40	12.75	3.20
11	12.50	15.65	14.00	4.70
12	13.75	16.90	15.25	4.70
13	15.00	18.15	16.50	4.70
14	16.25	19.40	17.75	4.70
15	17.50	20.65	19.00	4.70
20	23.75	26.90	25.25	4.70
25	30.00	33.15	31.50	5.70
30	36.25	39.40	37.75	5.70

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.25
0.00 $\pm$ 0.15
0.000 $\pm$ 0.08

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吳奇泰

吳奇泰

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1255H00-NP-K

DESCRITON

DF14 HSG With-Lock

DRAWING NO.

A1255.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn