





RoHS





02P




03P

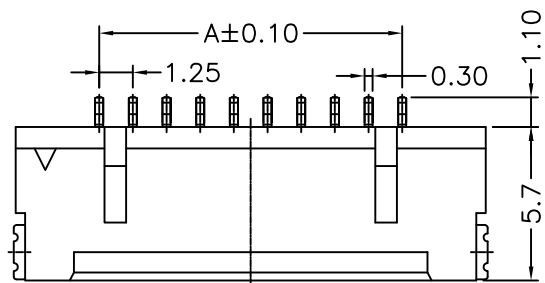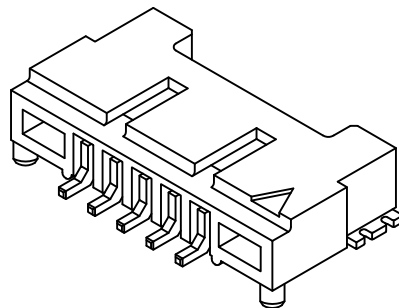

04P~30P

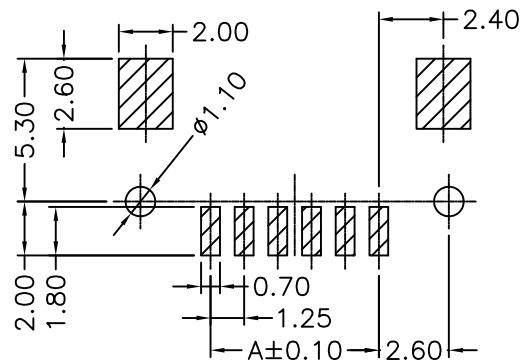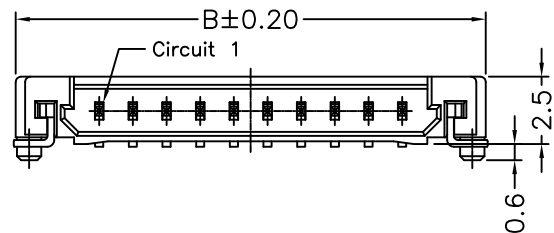

P.C.B. LAYOUT



SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

Circuits	Dimensions	
	A	B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.08

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张舒春

张舒春

XD1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm
A4
1/1
1:1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1255WR0-SF-NP

DESCRITON

DF14 WFR With-Boss

DRAWING NO.

A1255.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn