



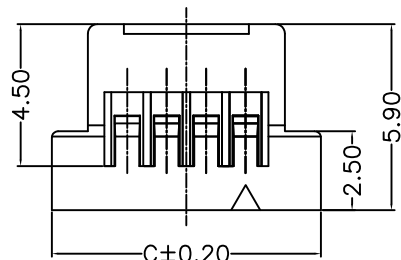
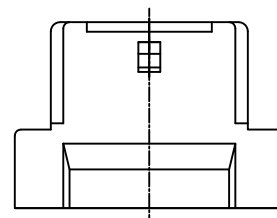



RoHS




1. A1256H00-4P~6P雙凸点
2. A1256H00-7P~30P雙凸點




A1256H00-4P~6P單凸点



A1256H00-2P單凸点



A1256H00-3P單凸点

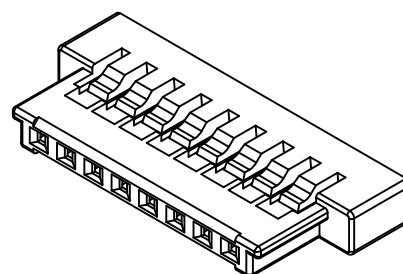

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage:500V AC/minute
Material: Nylon 66,UL94V-0
Color: Black

Circuits	Dimensions			
	A	B	C	D
2	1.25	3.00	6.05	--
3	2.50	4.25	7.30	--
4	3.75	5.50	8.55	2.50
5	5.00	6.75	9.80	3.75
6	6.25	8.00	11.05	5.00
7	7.50	9.25	12.30	6.25
8	8.75	10.50	13.55	7.50
9	10.00	11.75	14.80	8.75
10	11.25	13.00	16.05	10.00
11	12.50	14.25	17.30	11.25
12	13.75	15.50	18.55	12.50
15	17.50	19.25	22.30	16.25
16	18.75	20.50	23.55	17.50
20	23.75	25.50	28.55	22.50
25	30.00	31.75	34.80	28.75
30	36.25	38.00	41.05	35.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

SCALE

1:1
mm
A4
1/1

UNIT

mm
A4
1/1

UNC 耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A1256H00-1XNP
DESCRITON FIS1.25 HOUSING
DRAWING NO. A1256.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn