

RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$






Contact Resistance: 20m Ω Max.

Insulation Resistance: 100M Ω Min.

Withstanding Voltage: 500V AC/minute

Material: PA66,UL94V-0

Color: Natural(White)

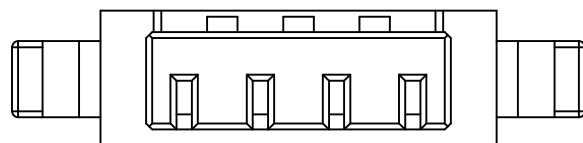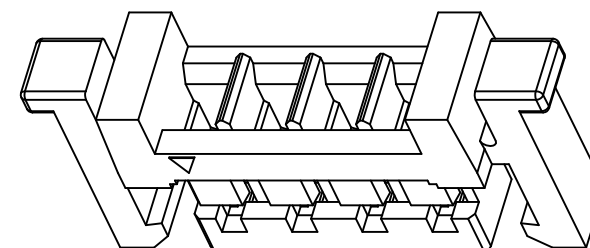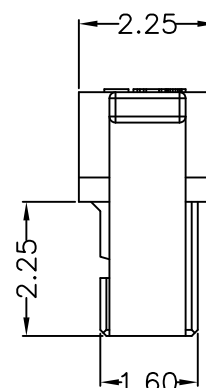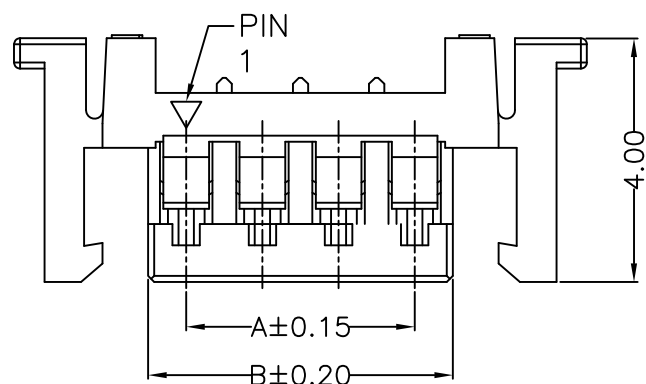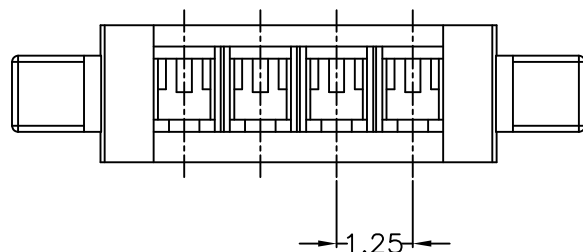

Pole	Dimension(mm)	
	A	B
03P	2.50	3.75
04P	3.75	5.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.15
0.00 $\pm$ 0.10
0.000 $\pm$ 0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吴奇春

吴奇春

QY1

SCALE

1:1

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1:1

mm

A4

1/1

PROJ.

1:1

mm

A4

1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1258H00-NP

DESCRITON

A1258 Housing

DRAWING NO.

A1258.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn