



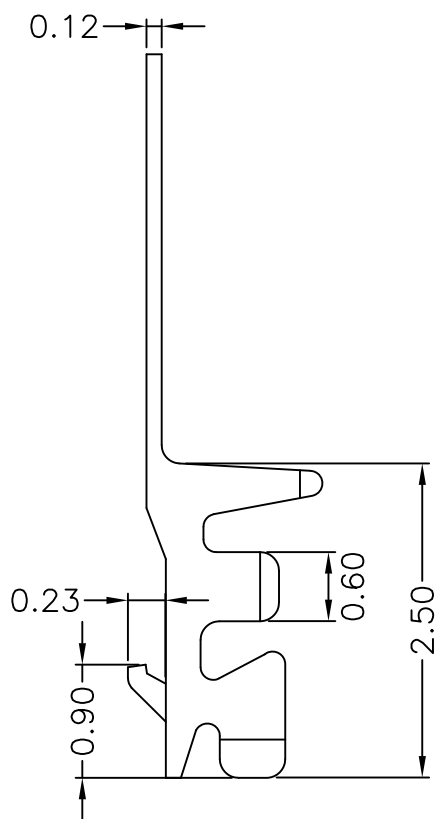


RoHS

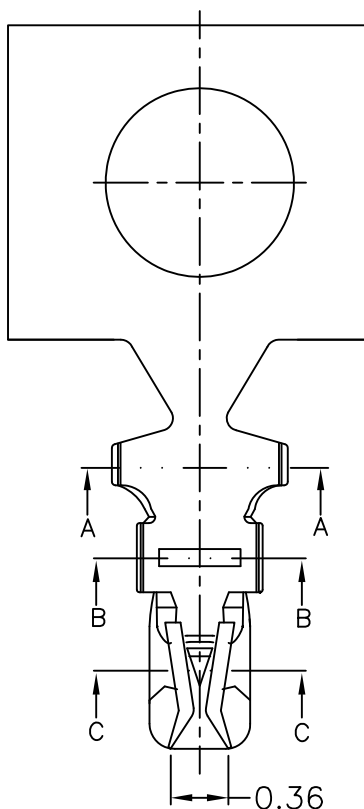

Plating Spec (0*)

00--1μ"
0A--3μ"
0B--4μ"
0C--5μ"
0D--15μ"
0E--30μ"
0F--50μ"
0G--10μ"
0H--2μ"
0I--20μ"
0J--25μ"

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/Reel
A1258TOP-0*	AWG 28#~30#	0.90mm(Max)	Phos.Bronze	Gold-Flash	20,000
A1258TOP-2e	AWG 28#~30#	0.90mm(Max)	Phos.Bronze	Tin-Plated	20,000

Note: e-Stamping before Tin-plated or Gold-flash

NOTE:

A. Gold Plated Area.

B. Tested Area For Coating Thickness.

C. Point of Measurement For Coating Thickness.

REVISION RECORD					TOLERANCE	DRAW		SCALE	1:1	UNC 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE		DESIGN	校核				
					.0±0.15	CHECK	吳奇春	UNIT	mm	PART NO.	A1258TOP-xx
					0.00±0.10	APPROVE	吳奇春	SIZE	A4	DESCRITON	1258 TERMINAL
					0.000±0.05	VERSION	QY1	SHEET	1/1	DRAWING NO.	A1258.dwg
						TEL:0769-87299998		FAX:0769-87299968		E-Mail:uniconn@163.com	
										WEB:http://www.uniconn.cn	

UNC 耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A1258TOP-xx
DESCRITON 1258 TERMINAL
DRAWING NO. A1258.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn