

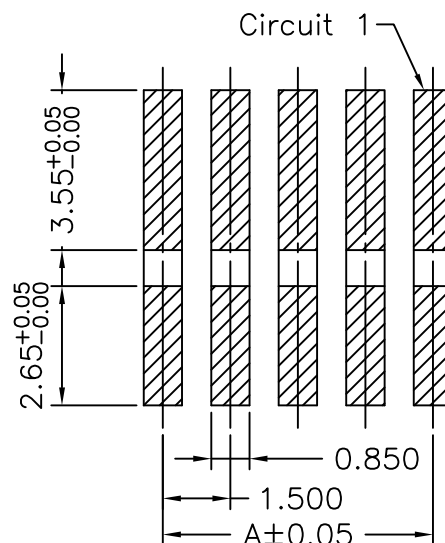
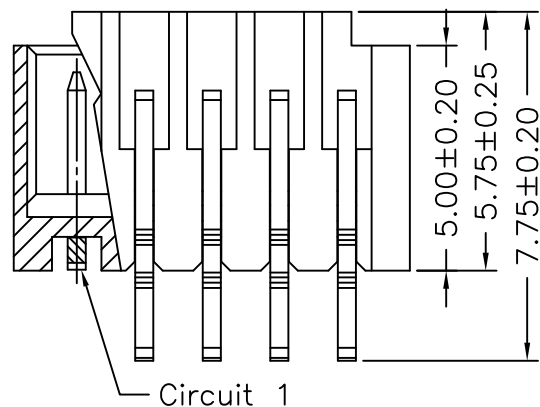


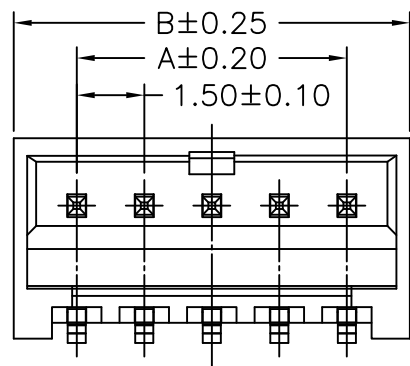

PCB LAYOUT

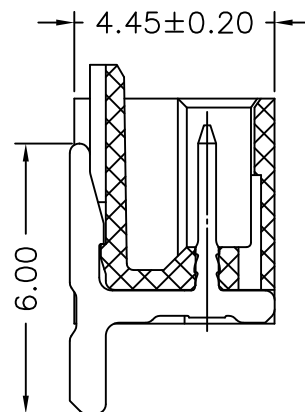

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute


Material:

PIN: Brass/Tin-plated

HOUSING: LCP/HF,UL94V-0

Color: Natural(White)

Q'TY: 1,000/REEL

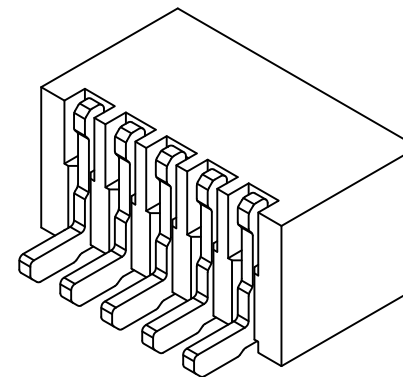

Circuits	Dimensions	
	A	B
2	1.50	4.30
3	3.00	5.80
4	4.50	7.30
5	6.00	8.80
6	7.50	10.30
7	9.00	11.80
8	10.50	13.30
9	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE
2	2019-2-25	Material: PA6T > LCP/HF	BO	CHEN

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭皓

旭皓

吳奇泰

吳奇泰

TM2

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1502WR0-S-NP

DESCRITON

MX87439 90° WFR

DRAWING NO.

A1502.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn