

SPECIFICATIONS

Current Rating: Sinal circuit: 1A AC,DC

Power supply circuit: 5A AC,DC (AWG#22)

Voltage Rating: 30V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

(Including temperature rise in applying electrical current)

Contact Resistance: Inital value 10m Ω Max.

Insulation Resistance: 100M Ω Min.

Withstanding Voltage: 200V AC/minute






Applicable wire:

Sinal circuit: Conductor size: AWG #30~#28 (Insulation O.D.: 0.5~0.63mm)




Power supply circuit: Conductor size: AWG #26~#22

AWG #22: Recommend UL3619 (Insulation O.D.: 0.98~1.16mm)

Material: Nylon66 UL94V-0 Natrue

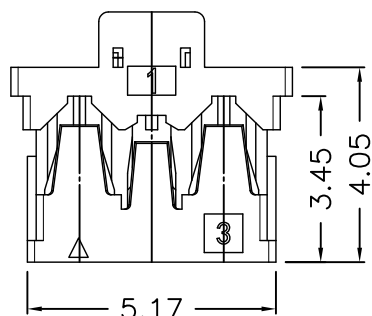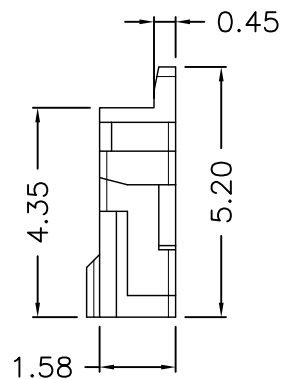

SECTION A-A

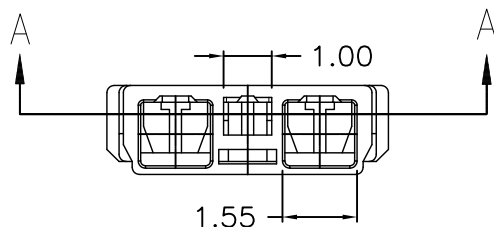

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.20
0.00 $\pm$ 0.15
0.000 $\pm$ 0.05

DRAW

DESIGN

CHECK

APPROVE

VERSION

无

无

无

无

ZL1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1504H00-3P

DESCRITON

1.50mm PITCH

DRAWING NO.

HOUSING

TEL:0769-87299998

E-Mail:uniconn@163.com

WEB:http://www.uniconn.cn