
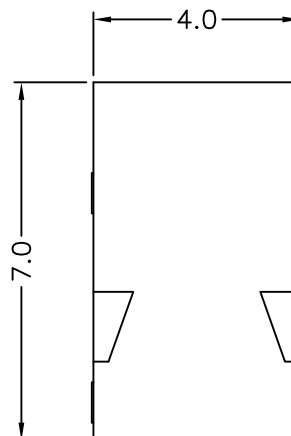


[illegible]

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon66/PBT UL94V-0
Color: Black

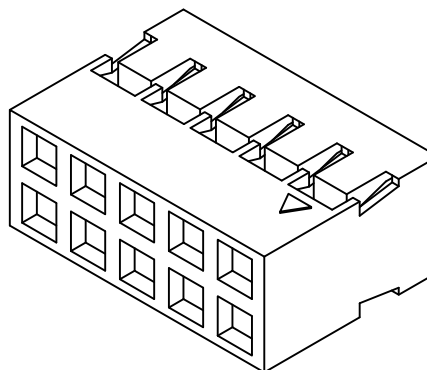

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2X2	2.00	4.20	2X14	26.00	28.20
2X3	4.00	6.20	2X15	28.00	30.20
2X4	6.00	8.20	2X16	30.00	32.20
2X5	8.00	10.20	2X17	32.00	34.20
2X6	10.00	12.20	2X18	34.00	36.20
2X7	12.00	14.20	2X19	36.00	38.20
2X8	14.00	16.20	2X20	38.00	40.20
2X9	16.00	18.20	2X21	40.00	42.20
2X10	18.00	20.20	2X22	42.00	44.20
2X11	20.00	22.20	2X23	44.00	46.20
2X12	22.00	24.20	2X24	46.00	48.20
2X13	24.00	26.20	2X25	48.00	50.20

REVISION RECORD					TOLERANCE	DRAW	比例	SCALE	1:1	 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE		DESIGN	比例	UNIT	mm		
					.0±0.25	CHECK	吳新泰	SIZE	A4	PART NO.	A2002H00-2XNP
					0.00±0.15	APPROVE	吳新泰	SHEET	1/1	DESCRITON	DP2.0 Dual-Row HSG
					0.000±0.05	VERSION	ZJT1	PROJ.		DRAWING NO.	A2002.dwg
					TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn						