
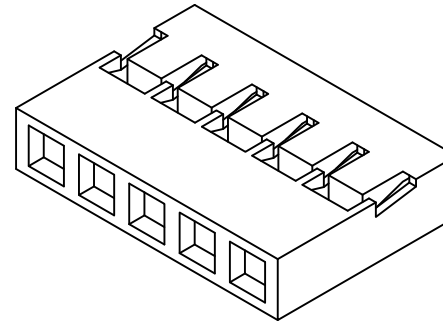
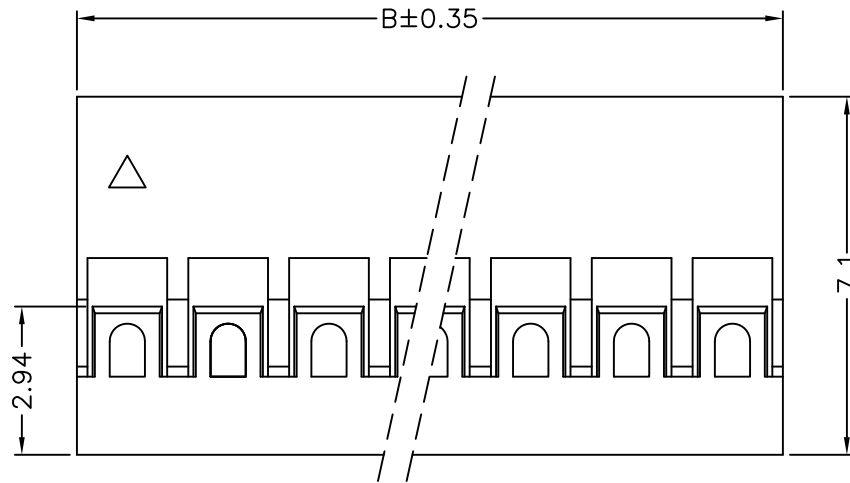


堵孔

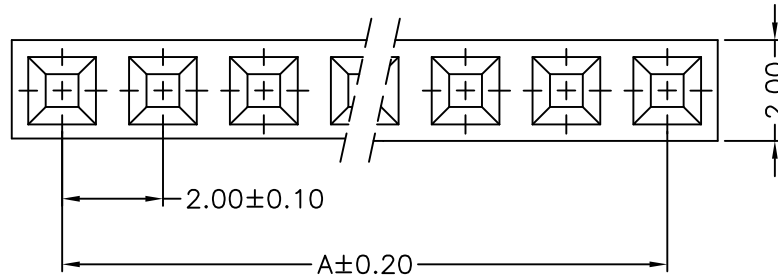

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon66/PBT UL94V-0
Color: Black

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	2.00	4.40	17	32.00	34.40
3	4.00	6.40	18	34.00	36.40
4	6.00	8.40	19	36.00	38.40
5	8.00	10.40	20	38.00	40.40
6	10.00	12.40	21	40.00	42.40
7	12.00	14.40	22	42.00	44.40
8	14.00	16.40	23	44.00	46.40
9	16.00	18.40	24	46.00	48.40
10	18.00	20.40	25	48.00	50.40
11	20.00	22.40	26	50.00	52.40
12	22.00	24.40	27	52.00	54.40
13	24.00	26.40	28	54.00	56.40
14	26.00	28.40	27	56.00	58.40
15	28.00	30.40	28	58.00	60.40
16	30.00	32.40			

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张奇春

张奇春

ZL1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2002H00-NP

DESCRITON

DP2.0 Single-Row HSG

DRAWING NO.

A2002.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn