
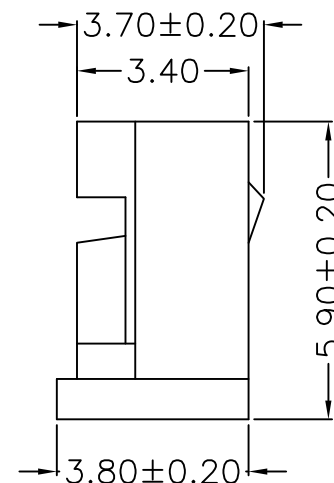
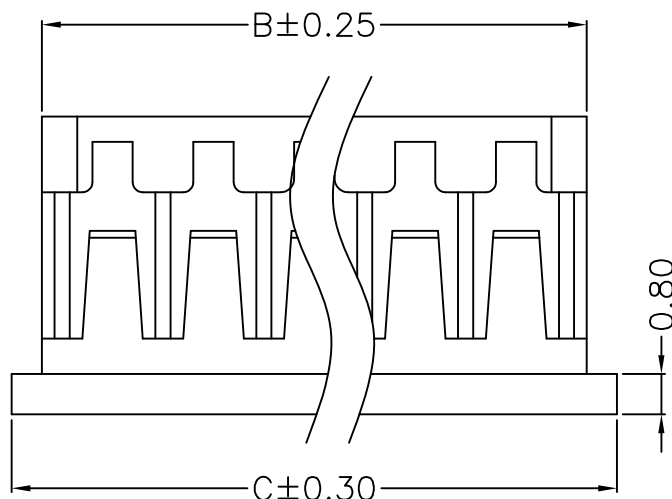
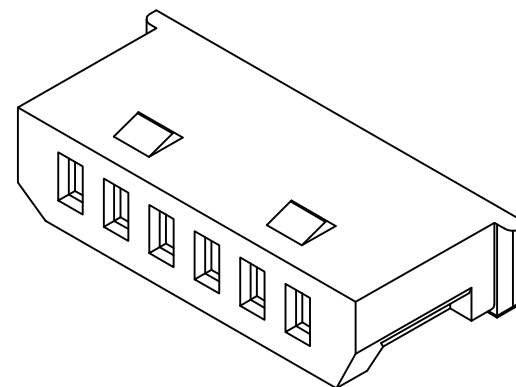


RoHS

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1,000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0
Q'TY: 1,000/Bag

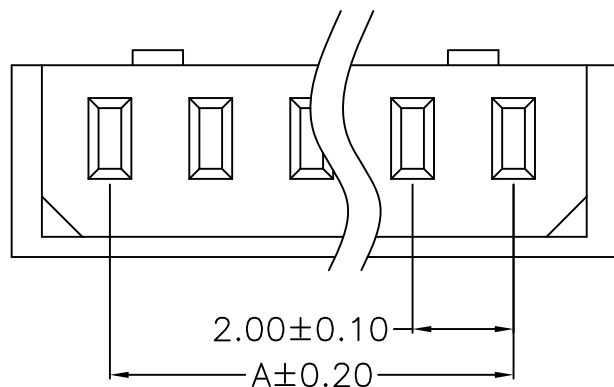

Circuits	Dimensions		
	A	B	C
2	2.00	5.10	6.20
3	4.00	7.10	8.20
4	6.00	9.10	10.20
5	8.00	11.10	12.20
6	10.00	13.10	14.20
7	12.00	15.10	16.20
8	14.00	17.10	18.20
9	16.00	19.10	20.20
10	18.00	21.10	22.20
11	20.00	23.10	24.20
12	22.00	25.10	26.20
13	24.00	27.10	28.20
14	26.00	29.10	30.20
15	28.00	31.10	32.20

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.20
0.000±0.15

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭能

旭能

张舒豪

张舒豪

XY1

SCALE

1:1
UNIT
SIZE
SHEET
PROJ.

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2004H00-NP

DESCRITON

MX2.00mm Housing

DRAWING NO.

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn