





RoHS



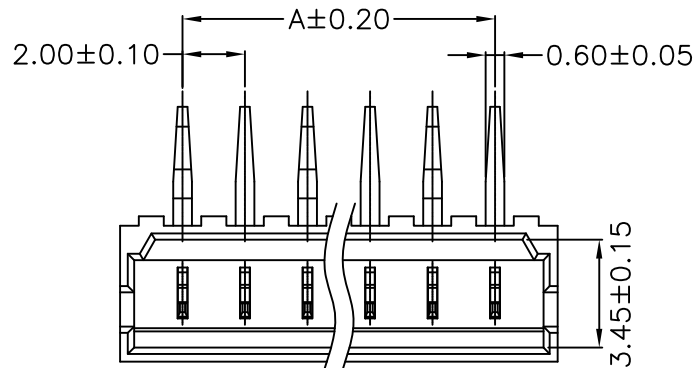


SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1,000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material:
HSG: Nylon 66+15%GF,UL94V-0
PIN: Brass,Tin-Plated
Q'TY: 1,000/Bag

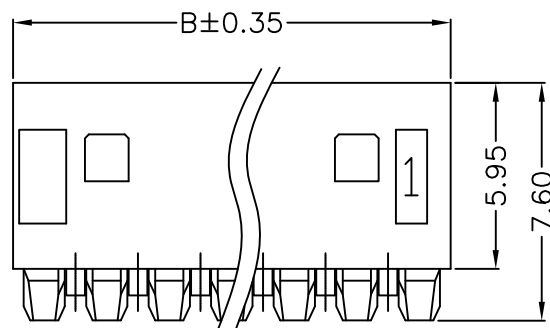

04P-05P

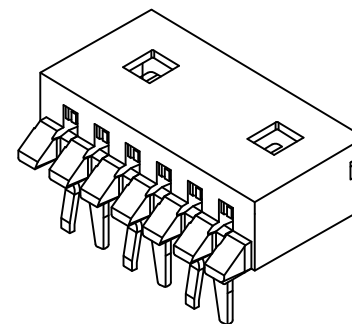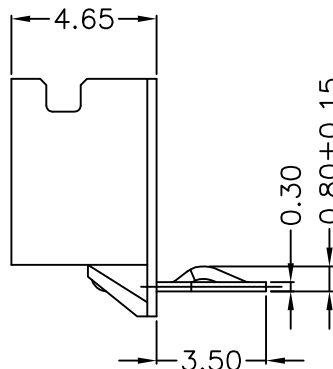

P.C.B LAYOUT

Circuits	Dimensions		
	A	B	C
2	2.00	6.00	5.10
3	4.00	8.00	7.10
4	6.00	10.00	9.10
5	8.00	12.00	11.10
6	10.00	14.00	13.10
7	12.00	16.00	15.10
8	14.00	18.00	17.10
9	16.00	20.00	19.10
10	18.00	22.00	21.10
11	20.00	24.00	23.10
12	22.00	26.00	25.10
13	24.00	28.00	27.10
14	26.00	30.00	29.10
15	28.00	32.00	31.10

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.20
0.000±0.15

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吳奇泰

吳奇泰

XY1

SCALE

1:1

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

XY1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2004WR0-NP

DESCRITON

MX2.00mm 90° WFR

DRAWING NO.

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn