
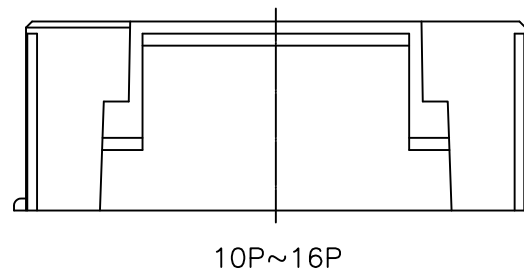








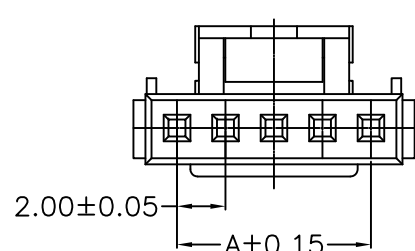


RoHS

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)



Circuits	Dimensions			
	A	B	C	D
2	2.00	4.60	5.60	2.30
3	4.00	6.60	7.60	2.30
4	6.00	8.60	9.60	4.30
5	8.00	10.60	11.60	6.50
6	10.00	12.60	13.60	6.50
7	12.00	14.60	15.60	6.50
8	14.00	16.60	17.60	6.50
9	16.00	18.60	19.60	6.50
10	18.00	20.60	21.60	14.50
11	20.00	22.60	23.60	14.50
12	22.00	24.60	25.60	14.50
13	24.00	26.60	27.60	14.50
14	26.00	28.60	29.60	14.50
15	28.00	30.60	31.60	14.50
16	30.00	32.60	33.60	14.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭德

旭德

张永春

张永春

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2005H00-NP

DESCRITON

PHS2.0 HOUSING

DRAWING NO.

A2005.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn