



RoHS

SPECIFICATIONS



Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 1000V AC/minute
Material: PIN: Brass/Tin-plated
HSG: Nylon 46/66,UL94V-0
Color: Natural(White)

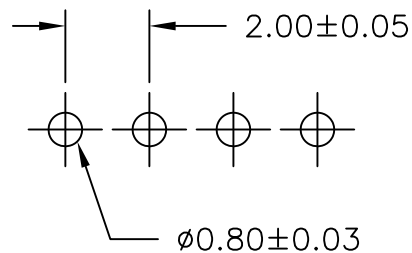

P.C.B LAYOUT

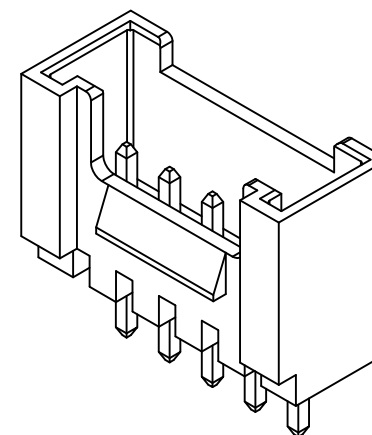

Circuits	Dimensions	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

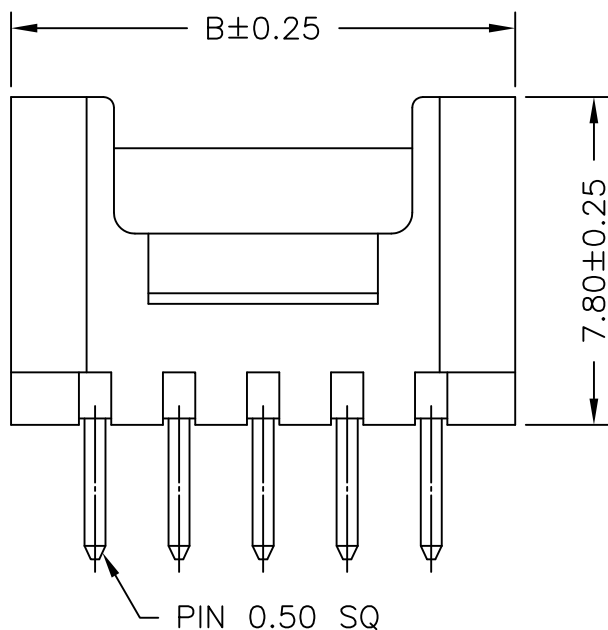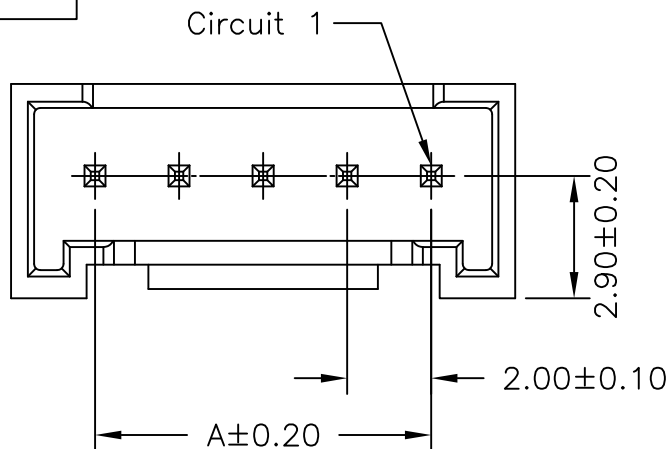

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭能

旭能

张舒

张舒

CD1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

CD1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2005WV0-NP

DESCRITON

PHS2.0 180° Wafer

DRAWING NO.

A2005.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn