
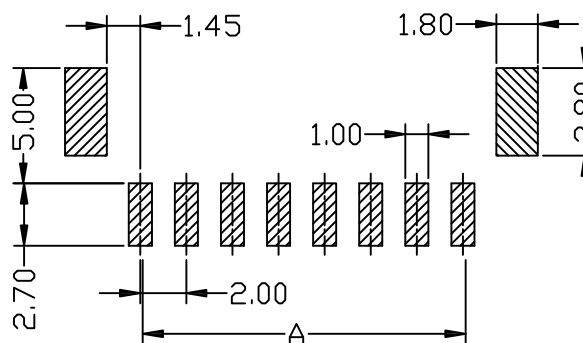


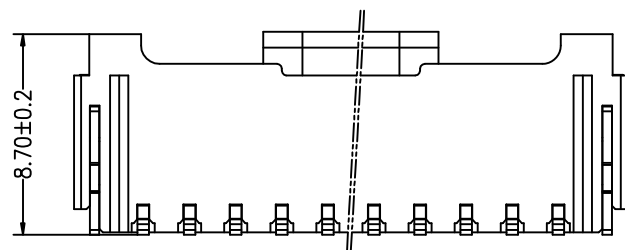



RoHS

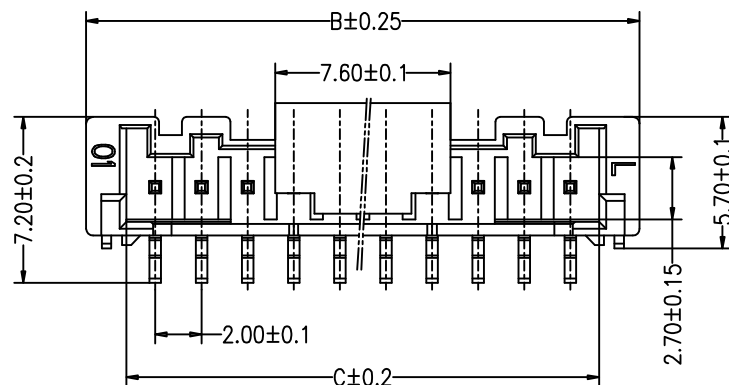

PCB LAYOUT

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 800V AC/minute
Material:
Wafer: LCP,UL94V-0
PIN: Brass,Tin-Plated

Circuits	Dimensions		
	A	B	C
2	2.00	8.00	4.50
3	4.00	10.00	6.50
4	6.00	12.00	8.50
5	8.00	14.00	10.50
6	10.00	16.00	12.50
7	12.00	18.00	14.50
8	14.00	20.00	16.50
9	16.00	22.00	18.50
10	18.00	24.00	20.50
11	20.00	26.00	22.50
12	22.00	28.00	24.50
13	24.00	30.00	26.50
14	26.00	32.00	28.50
15	28.00	34.00	30.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.25
0.00 $\pm$ 0.15
0.000 $\pm$ 0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

无格

无格

无格

无格

J 1

SCALE

1:1

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

无格



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2010WV0-S-NP

DESCRITON

2.00mm PITCH

DRAWING NO.

180° WAFER SMT-TYPE

TEL:0769-87299998

FAX:0769-87299968

E-Mail:uniconn@163.com

WEB:http://www.uniconn.cn