


RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)

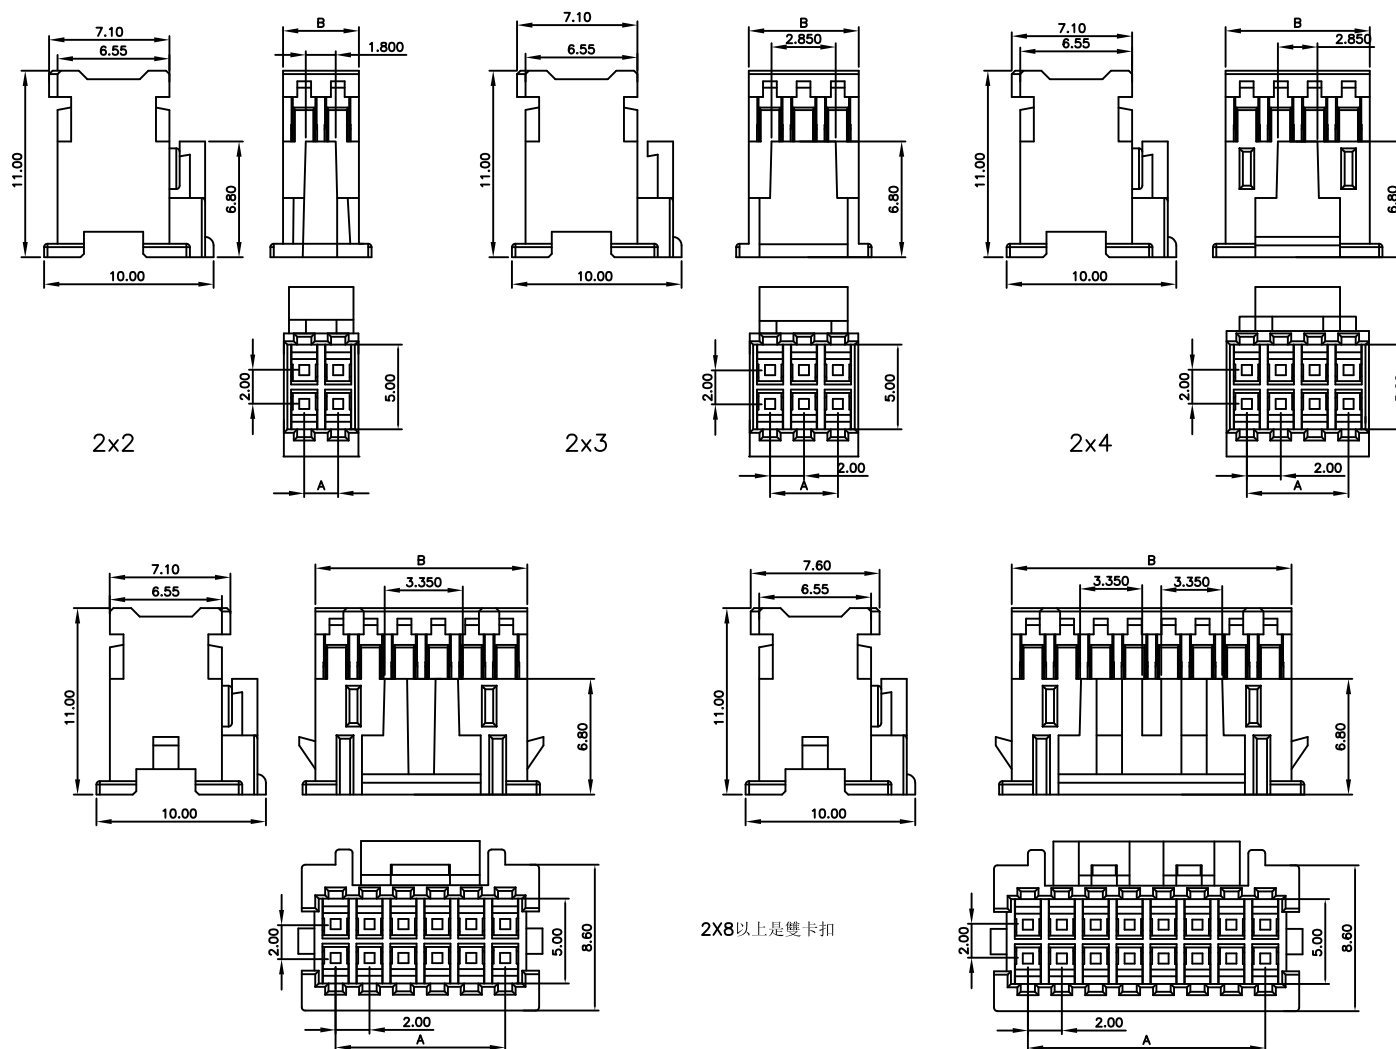

Circuits	Dimensions	
	A	B
2X2	2.00	5.00
2X3	4.00	7.00
2X4	6.00	9.00
2X5	8.00	10.50
2X6	10.00	12.50
2X7	12.00	14.50
2X8	14.00	16.50
2X9	16.00	18.50
2X10	18.00	20.50
2X11	20.00	22.50
2X12	22.00	24.50
2X13	24.00	26.50
2X14	26.00	28.50
2X15	28.00	30.50
2X16	30.00	32.50
2x17	32.00	34.50
2x18	34.00	36.50
2x19	36.00	38.50
2x20	38.00	40.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

0.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

地德

地德

彭海

彭海

GB1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRIPTION

DRAWING NO.

A2012H00-2XNP

2.00mm PITCH

HOUSING PLUG

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn