

RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C





Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.




Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

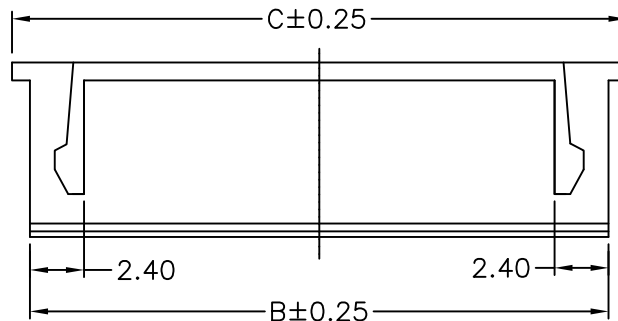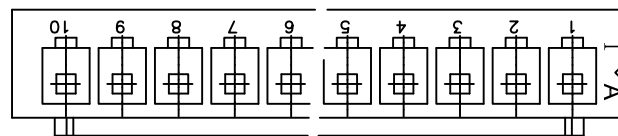

SEC: A-A

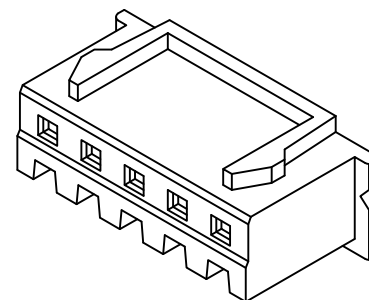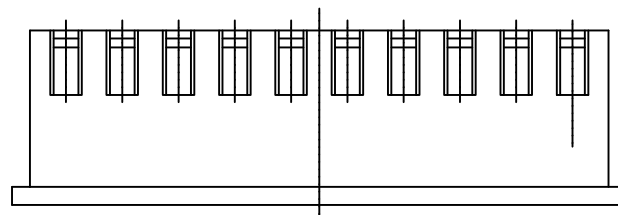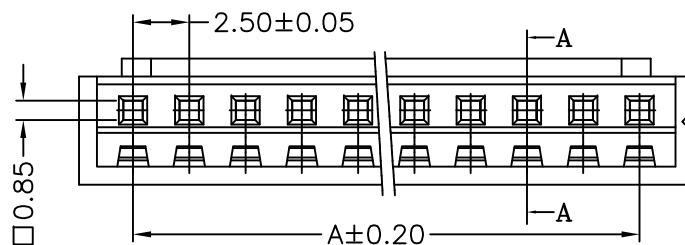

Circuits	Dimensions		
	A	B	C
2	2.50	5.70	7.30
3	5.00	8.20	9.80
4	7.50	10.70	12.30
5	10.00	13.20	14.80
6	12.50	15.70	17.30
7	15.00	18.20	19.80
8	17.50	20.70	22.30
9	20.00	23.20	24.80
10	22.50	25.70	27.30
11	25.00	28.20	29.80
12	27.50	30.70	32.30
13	30.00	33.20	34.80
14	32.50	35.70	37.30
15	35.00	38.20	39.80
16	47.50	50.70	52.30

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭能

旭能

张舒

张舒

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2501H00-NP

DESCRITON

XH2.5 HOUSING

DRAWING NO.

A2501.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn