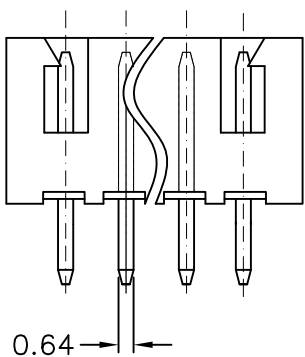




SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material:

Pin: Brass/Tip-Plated

Housing: PA66 94-V0

Q'ty: 500/1,000/2,000/Reel

Circuits	Dimensions	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭能

旭能

吴奇春

吴奇春

JD1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm
A4
1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A2501WV0-NP
DESCRITON XH2.5 180°WAFER-DIP
DRAWING NO. A2501.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn