

RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$





Contact Resistance: 10m Ω Max.

Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 1000V AC/minute

Material:

Housing: PA66 94-V2

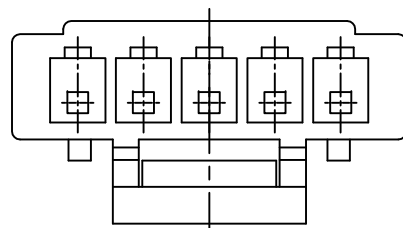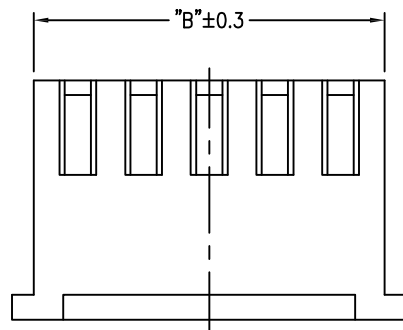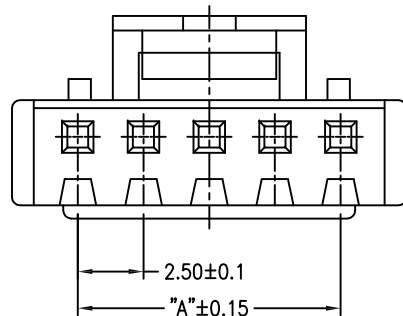

Circuits	Dimensions	
	A	B
2	2.5	5.7
3	5.0	8.2
4	7.5	10.7
5	10.0	13.2
6	12.5	15.7
7	15.0	18.2
8	17.5	20.7
9	20.0	23.2
10	22.5	25.7
11	25.0	28.2
12	27.5	30.7
13	30.0	33.2
14	32.5	35.7
15	35.0	38.2

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.30
0.00 $\pm$ 0.25
0.000 $\pm$ 0.15

DRAW

DESIGN
CHECK
APPROVE
VERSION

邓伟

邓伟

邓伟

邓伟

JD1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2511H02-NP

DESCRITON

XHS2.5 HOUSING

DRAWING NO.

A2511.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn