

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

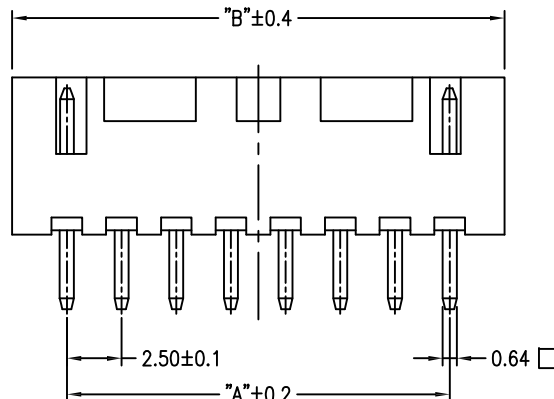
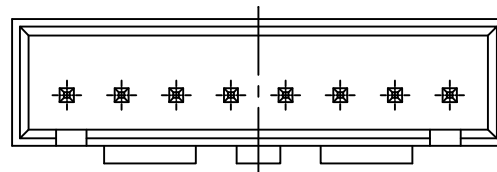
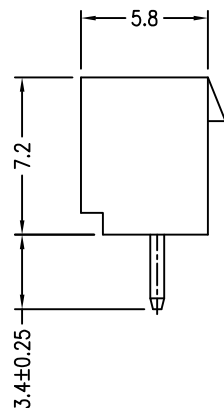




Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: 10m Ω Max.Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 1000V AC/minute

Material:

Pin: Brass/Tip-Plated

Housing: PA66 94-V2

5P~16P2P3P4PP.C.B LAYOUT

Circuits	Dimensions	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.30
0.00±0.25
0.000±0.15

DRAW

DESIGN	
CHECK	
APPROVE	
VERSION	JD1

SCALE

UNIT	1:1
SIZE	mm
SHEET	A4
PROJ.	1/1

耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2511WV2-NP

DESCRITON

XHS2.5 180°WAFER-DIP

DRAWING NO.

A2511.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn