





RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 1500V AC/minute
Material: Nylon66+GF UL94V-0
Color: Black

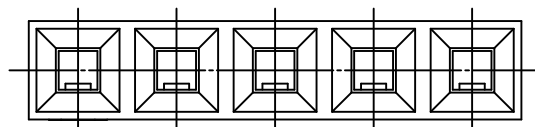

2.54
 $A \pm 0.20$

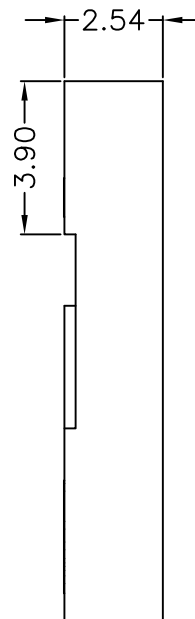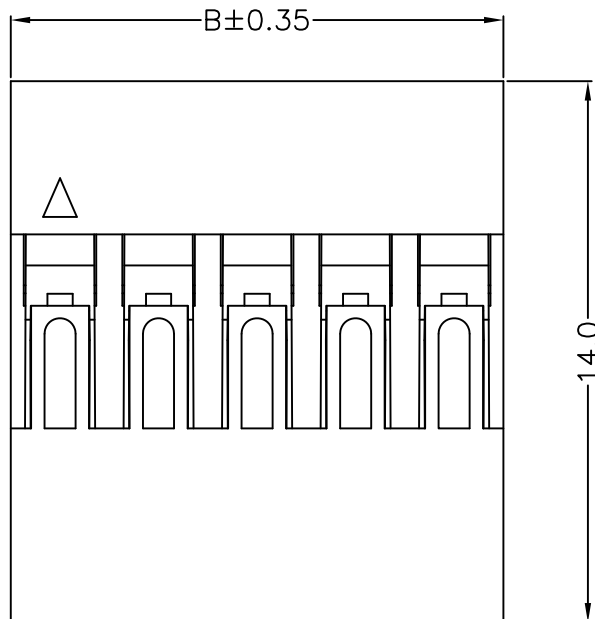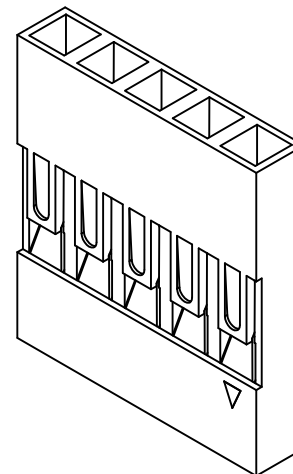

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	2.54	5.08	14	33.02	35.56
3	5.08	7.62	15	35.56	38.10
4	7.62	10.16	16	38.10	40.64
5	10.16	12.70	17	40.64	43.18
6	12.70	15.24	18	43.18	45.72
7	15.24	17.78	19	45.72	48.26
8	17.78	20.32	20	48.26	50.80
9	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.94	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02	25	60.96	63.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

$.0 \pm 0.25$
 0.00 ± 0.15
 0.000 ± 0.05

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭德

旭德

张奇春

张奇春

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2541H00-1XNP

DESCRITON

DP2.54 Single-Row HSG

DRAWING NO.

A2541.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn