



RoHS

SPECIFICATIONS




Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 1500V AC/minute
Material:

HSG:PBT+15%GF UL94V-0

PIN:Brass/Gold-Flash

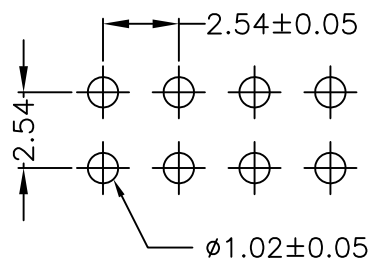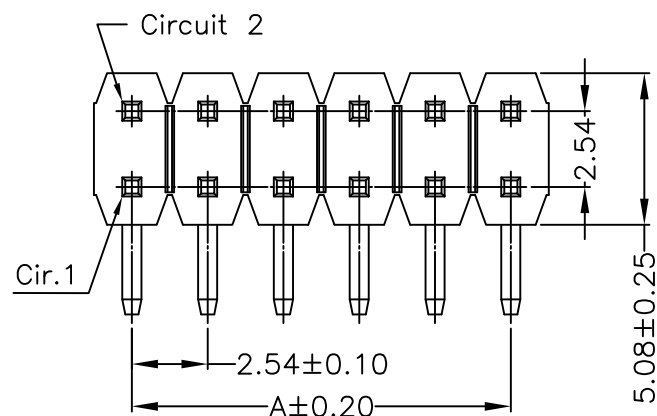

P.C.B LAYOUT

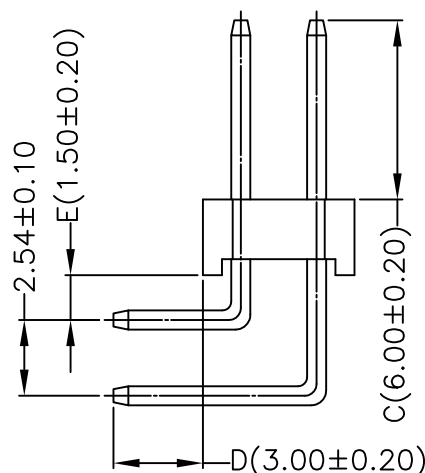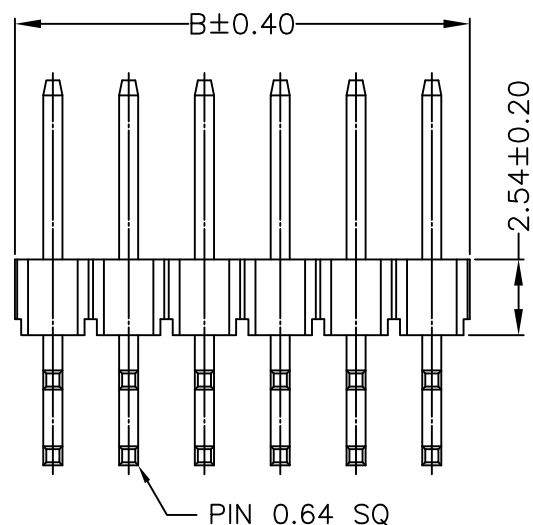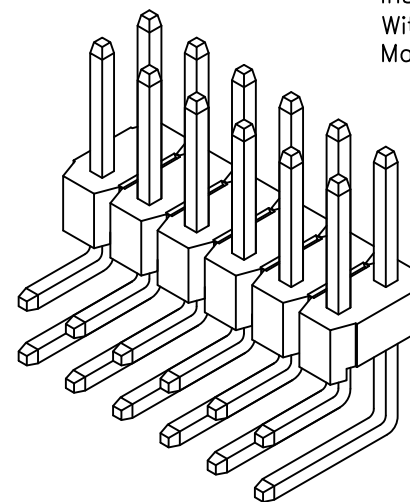

*Optional Dim. available but
MOQ requested*

Circuits	Dimensions		Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B		A	B
2X2	2.54	5.08	2X15	35.56	38.10	2X28	68.58	71.12
2X3	5.08	7.62	2X16	38.10	40.64	2X29	71.12	73.66
2X4	7.62	10.16	2X17	40.64	43.18	2X30	73.66	76.20
2X5	10.16	12.70	2X18	43.18	45.72	2X31	76.20	78.74
2X6	12.70	15.24	2X19	45.72	48.26	2X32	78.74	81.28
2X7	15.24	17.78	2X20	48.26	50.80	2X33	81.28	83.82
2X8	17.78	20.32	2X21	50.80	53.34	2X34	83.82	86.36
2X9	20.32	22.86	2X22	53.34	55.88	2X35	86.36	88.90
2X10	22.86	25.40	2X23	55.88	58.42	2X36	88.90	91.44
2X11	25.40	27.94	2X24	58.42	60.96	2X37	91.44	93.98
2X12	27.94	30.48	2X25	60.96	63.50	2X38	93.98	96.52
2X13	30.48	33.02	2X26	63.50	66.04	2X39	96.52	99.06
2X14	33.02	35.56	2X27	66.04	68.58	2X40	99.06	101.60

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

SCALE

1:1
UNIT
SIZE
SHEET
PROJ.

1:1

mm
A4
1/1
PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO. A2541WR0-2XNP
DESCRITON DP2.54 Dual-Row PIN-HEADER
DRAWING NO. A2541.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn