







RoHS

SPECIFICATIONS


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: Nylon 66+15%GF, UL94V-0
Color: Black

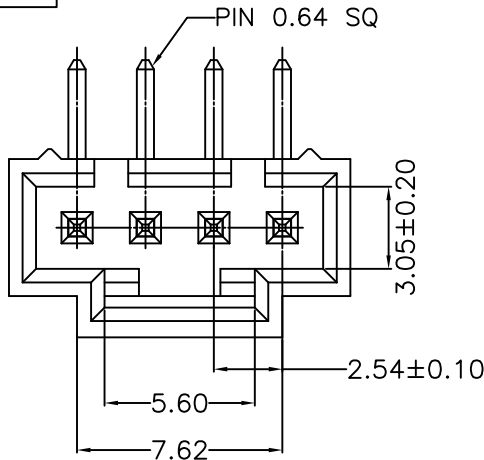

P.C.B LAYOUT

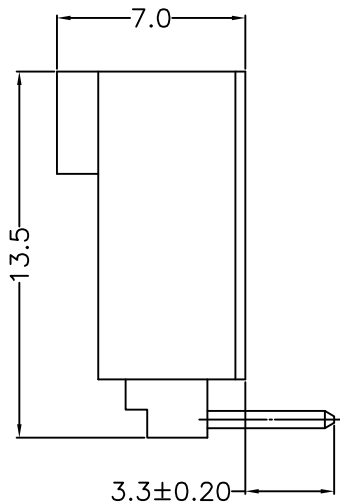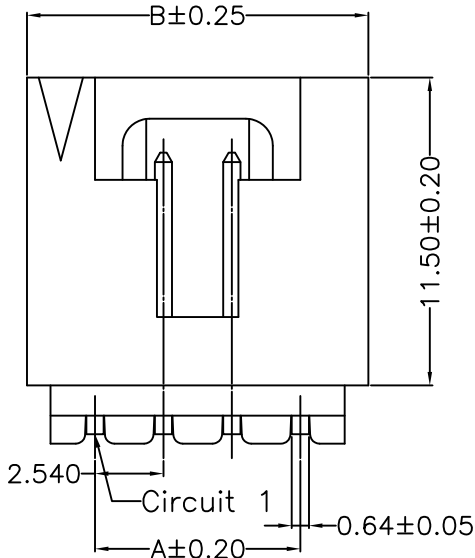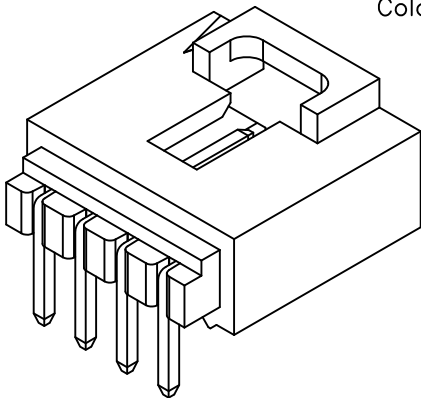

2P



3P

Circuits	Dimensions	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE
.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张舒

张舒

XY1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm
A4
1/1
⌀



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

A2545WR0-NP

WIRE TO BOARD, PLUG,
PITCH 2.54mm, CRIMP TYPE,
INSULATOR