



RoHS

SPECIFICATIONS







Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: Nylon 6T/9T,UL94V-0
Color: Black



03P



02P

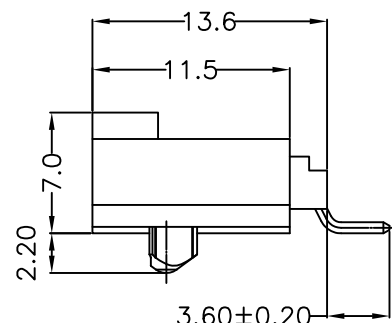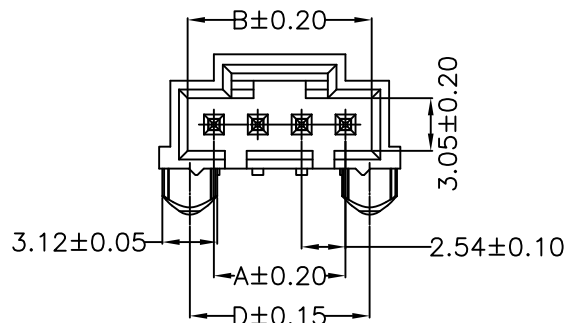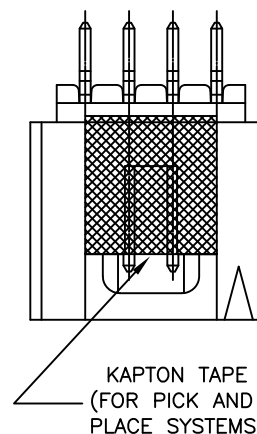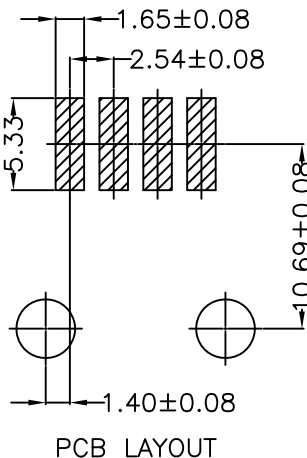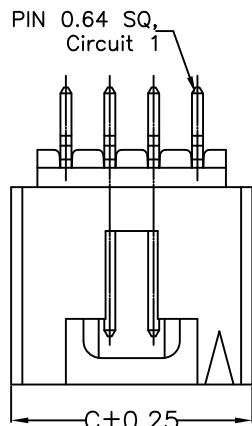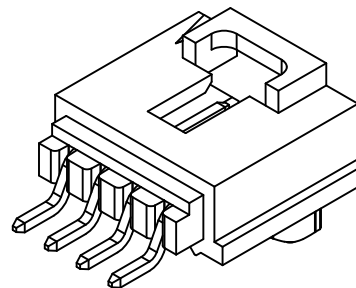

Circuits	Dimensions			
	A	B	C	D
2	2.54	5.58	8.89	5.33
3	5.08	8.12	11.43	7.87
4	7.62	10.66	13.97	10.41
5	10.16	13.20	16.51	12.95
6	12.70	15.74	19.05	15.49
7	15.24	18.28	21.59	18.03
8	17.78	20.82	24.13	20.57
9	20.32	23.36	26.67	23.11
10	22.86	25.90	29.21	25.65
11	25.40	28.44	31.75	28.19
12	27.94	30.98	34.29	30.73

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

吴奇泰

吴奇泰

XY1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm
A4
1/1
1:1



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A2545WR0-S-NP

DESCRITON

WIRE TO BOARD, PLUG,
PITCH 2.54mm, CRIMP TYPE,
INSULATOR

DRAWING NO.

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn