

RoHS

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: 10m Ω Max.Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 1,500V AC/minute



Material:

HSG: Nylon 66,UL94V-2




Contact: Brass, Tin-plated

Color: Natural(White)

Q'ty: 1,000/Bag

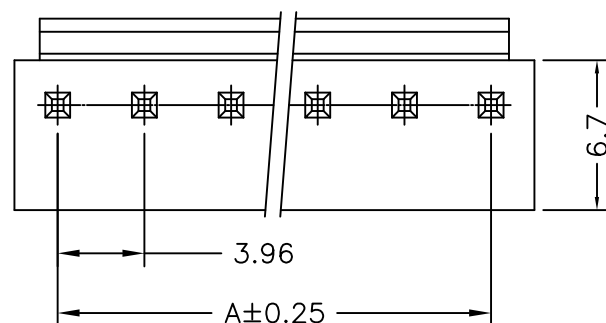

P.C.B LAYOUT

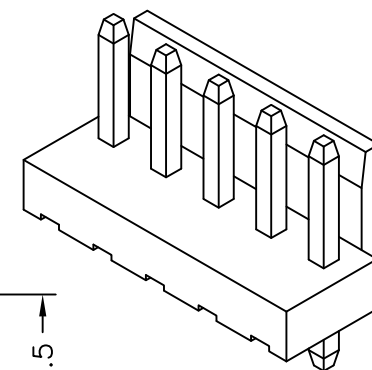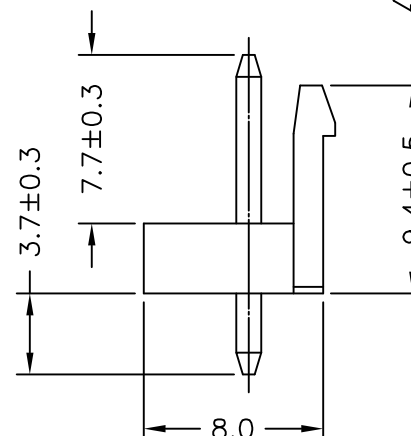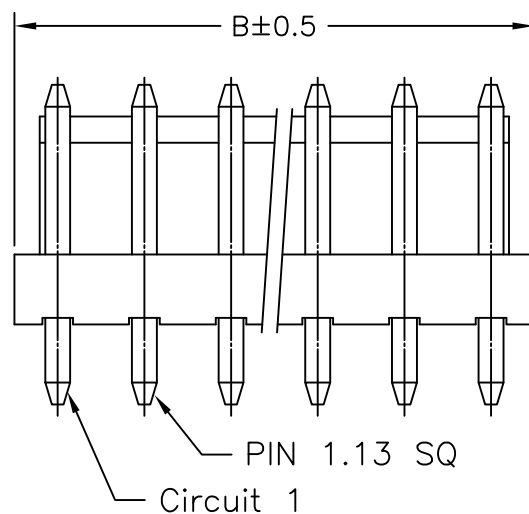

Circuits	Dimensions	
	A	B
2	3.96	8.02
3	7.92	11.98
4	11.88	15.94
5	15.84	19.90
6	19.80	23.86
7	23.76	27.82
8	27.72	31.78
9	31.68	35.74
10	35.64	39.70
11	39.60	43.66
12	43.56	47.62

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25

0.00±0.15

0.000±0.10

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭德

旭德

张舒

张舒

JD1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

UNC

耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A3963WV2-NP

DESCRITON

VH3.96 180° WFR

DRAWING NO.

A3963.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn