
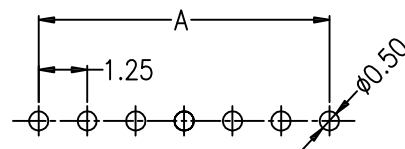


2P/3P:一个开口


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 250V AC/minute
Material:

Housing: Nylon46,UL94V-0
PIN: Phos.bronze,Tin-plated

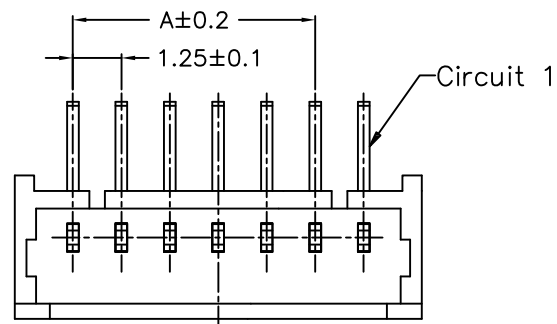

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

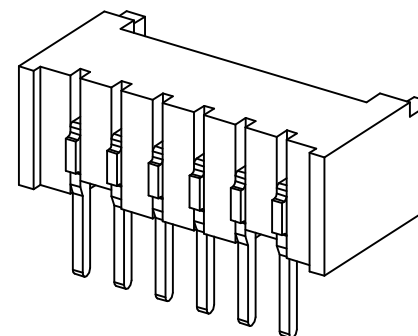

Circuits	Dimensions	
	A	B
2	1.25	4.35
3	2.50	5.60
4	3.75	6.85
5	5.00	8.10
6	6.25	9.35
7	7.50	10.60
8	8.75	11.85
9	10.00	13.10
10	11.25	14.35
11	12.50	15.60
12	13.75	16.85
13	15.00	18.10
14	16.25	19.35
15	17.50	20.60
16	18.75	21.85

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

邓伟

邓伟

邓伟

邓伟

JD1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1251WR0-NP

DESCRITON

MX1.25 90° WAFER

DRAWING NO.

A1251.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn